

2018 MODEL YEAR NITRO.COM





BASS PRO SHOPS. YOUR ADVENTURE STARTS HERE.

As part of the Bass Pro Shops® family, NITRO® boats are backed by a leader in the outdoor industry. You'll find NITRO boats at hundreds of quality dealers around the world, including more than 75 Bass Pro Shops locations and hundreds of quality independent dealers across to serve you for a very long time.

Anyone that's visited one of our Bass Pro Shops Outdoor World stores knows that these destinations are one-of-a-kind retail experiences filled with the finest outdoor gear—a trip you and your family will never forget whether you're browsing clothing, perusing premium fishing gear, or dining at one of our unique restaurants.

Inside, you'll also find a selection of our comprehensive line of fishing

and recreational boats in the Bass Pro Shops Boating Center[™], where choosing a boat is an enjoyable, no-pressure experience. We also offer in-house financing to make your boat purchase fast and easy, and our award-winning customer service culture makes any visit a pleasure. North America, the strength of our company means that we'll be here
Our sales people do not work on commission, meaning stress-free shopping as you choose your new boat.

> And as both the #1 recreational boat builder and the #1 Mercury® partner in the world, we're able to offer unparalleled access to service for your boat and outboard.

> All this, combined with the legacy and stability of Bass Pro Shops, means that the experience of buying and owning a NITRO boat is simply second to none.



WE STRIVE DAILY TO BUILD A BETTER HIGH-PERFORMANCE BASS BOAT AT A BETTER PRICE FOR **BOTH TOURNAMENT PROS** AND EVERYDAY ANGLERS."

JOHNNY MORRIS FOUNDER, BASS PRO SHOPS®

VIP DISCOUNT CARD



Buying a NITRO® is easy and rewarding. We offer each boat at a nationally advertised, NO HAGGLE NO HASSLE® price. And with

the purchase of any new NITRO, you'll receive a VIP owner's discount card, valid for up to two years. This card gives you 20% off Bass Pro Shops® brands like Johnny Morris® Signature Series rods and reels, RedHead® clothing, ASCEND® kayaks, XPS® lures and more, plus 10% off on most other items in the store.

2018 NITRO PRO FISHING TEAM

WARRIORS ON THE WATER. The NITRO® Elite Pro team continues to excel in the world of competitive fishing. So what's their advantage? The performance, reliability and fishability of NITRO boats, along with finely honed fishing skills learned during their hundreds of years of combined fishing experience. Keep your eyes on these fierce competitors at NITRO.COM and BASSMASTER.COM




Kalamazoo, MI Times in Money 244 1st Place Finishes 24 Top 10 Finishes 111 Career Winnings \$6.6 million



Talala, OK Times in Money 166 1st Place Finishes Top 10 Finishes 63 Career Winnings \$3 million



Knoxville, TN Times in Money 72 1st Place Finishes Top 10 Finishes 25 Career Winnings \$1.2 million



Ava, MO

Times in Money 284 1st Place Finishes Top 10 Finishes Career Winnings \$3.25 million



Muscle Shoals, AL 135 Times in Money 1st Place Finishes Top 10 Finishes Career Winnings \$1.6 million



Wagener, SC Times in Money 76 1st Place Finishes Top 10 Finishes Career Winnings \$970,000



Gilbert, AZ Times in Money 34 1st Place Finishes Top 10 Finishes Career Winnings \$350,000



Kalamazoo, MI 42 Times in Money 1st Place Finishes Top 10 Finishes Career Winnings \$530,000



Blacksburg, SC Times in Money 43 1st Place Finishes Top 10 Finishes **Career Winnings** \$769,000



Reeds Spring, MO Times in Money 101 1st Place Finishes Top 10 Finishes Career Winnings \$952,000



Lenexa, KS Times in Money 28 1st Place Finishes Top 10 Finishes **Career Winnings** \$280,000



Glidden, WI Professional Walleye Angler



Denmark, WI Professional Walleye Angler



Minot, ND Professional Walleye Angler



It's everyone's dream, and the Bass Pro Shops® Tournament Rewards® program makes it real. Win or hit the top ten in a NITRO® at an approved tournament and get cash!

The Bass Pro Shops Tournament Rewards program can help you enhance your tournament winnings! Through participation in this industry-leading program, you can receive up to \$7,000 in extra cash and Bass Pro Shops Rewards Points when you compete and win eligible tournaments from your NITRO boat.

FOR MORE INFORMATION AND A COMPLETE LIST OF ELIGIBLE TOURNAMENTS, **GO TO TOURNAMENT-REWARDS.COM**

OVER 11 YEARS



"Fishing tournaments out of a NITRO is exciting on its own, but knowing there's a cash reward if you place high enough puts it over the top. This is the best reward program in the industry."

- Alan Yarborough, \$42,000 in NITRO Tournament Rewards

BREAKDOWN OF WINNINGS:

[\$6,500 CASH + \$500 BASS PRO SHOPS® REWARD POINTS]
For winning a Bassmaster® Elite Series, Bass Pro Shops Bassmaster Open, FLW Tour®, or FLW Costa Series event from your NITRO®, TRACKER® or MAKO® boat powered by a 250HP or larger Mercury® outboard, Win \$5,000 (\$4,500 + \$500 BPS reward points) with a victory in other program-eligible events.

[\$4,500 CASH + \$500 BASS PRO SHOPS REWARD POINTS]
For winning a Bassmaster Elite Series, Bass Pro Shops Bassmaster Open, FLW Tour, or FLW Costa Series event from your NITRO, TRACKER or MAKO boat powered by a 225HP or larger Mercury outboard. Win \$3,000 (\$2,500 + \$500 BPS reward points) with a victory in other program-eligible events.

[\$2,500 CASH + \$500 BASS PRO SHOPS REWARD POINTS]
For winning from your NITRO, TRACKER or MAKO boat powered by a 200HP Mercury outboard in any program-eligible event.

[\$750 CASH + \$250 BASS PRO SHOPS REWARD POINTS]
For winning from your NITRO, TRACKER or MAKO boat powered by a 60–175HP Mercury outboard in any program-eligible event.

[\$400 CASH + \$100 BASS PRO SHOPS REWARD POINTS]
For winning any program-eligible event with a 20–59 boat field from your NITRO, TRACKER or MAKO boat powered by a 60HP or larger Mercury outboard.

For being the highest top ten finisher in a minimum 60 boat field from your NITRO, TRACKER or MAKO boat powered by a 60HP or larger Mercury outboard in any program-eligible event.





NEW! Z-CORE SEATING SYSTEM

Working closely with Kevin VanDam, NITRO is introducing the all-new Z-Core™ Seating System—a total redesign of the traditional high-performance bass boat seat.

The seat starts with an all-composite, rotomolded frame, manufactured in our own engineered polymer plant in Lebanon, Missouri. The frame is contoured to cradle the torso and has just enough flex to absorb punishing impacts on the water. A recess at the bottom is laced with Force Flex elastic suspension for even more added comfort.

The bucket-style seats feature wrap-around wings to help hold you in place while flying across choppy lakes, and premium marine grade upholstery, with vibrant color accents, is stitched and stretched in house to perfectly fit the custom frames.

Plus, the Z21 and Z20 Z-PRO Packages feature a power-inflatable air bladder, controlled by a button on the seat base, that supports the upper back when in the crouched running position, further enhancing your ability to control the boat in fast-paced tournament situations.



RECOGNIZED FOR EXCELLENCE IN CUSTOMER SATISFACTION FIVE YEARS IN A ROW



OUR CUSTOMERS HAVE SPOKEN

For five consecutive years, NITRO® fiberglass outboard boats have been recognized for excellence in customer satisfaction by the National Marine Manufacturers Association® (NMMA®).

This means that hundreds of feedback surveys returned by actual purchasers of NITRO fiberglass fishing boats reported average satisfaction ratings above 90 points on a scale of 100. With a NITRO, you get a steadfast dedication to quality that you can see in the fit and finish, feel in the smooth ride, and count on for a lifetime. Thanks to the skill and experience of our master fiberglass craftspeople, care is taken at every step in the process to ensure the finest, longest-lasting boat at the best price.

The CSI award from NMMA is a tribute to our skilled and dedicated boat makers and to the thousands of people in our company and dealer network who provide support to our customers. By working hard and working smart, they are delivering the promise of quality and value that has placed NITRO solidly among the leaders in performance fishing boats.

OPTIMIZED FOR MAXIMUM COMFORT AND

COMFORT

Padded, anti-fatigue bow decks (Z20, Z21), Z-Core™ seats with Force Flex suspension, recessed trolling-motor pedals, heavily-insulated coolers with trash receptacles, and optional removable port console keep you and your fishing partner comfortable on long, fast-paced tournament days.

FISHABILITY

Every NITRO® is designed with an interior built with one thing in mind—catching fish efficiently. Enormous front decks allow maximum mobility when battling unruly bass, and the low-profile gunnels mean less interference when flipping, pitching or landing a fish. In-deck storage holds more rods and gear than you'll ever need, and NITRO-exclusive Guardian™ livewells keep your catch healthy all the way to the weigh-in.



21' 2" (6.45 m) boat length **69.5** sq. ft. (6.46 sq. m) deck space



Z25

20' 2" (6.15 m) boat length **62** sq. ft. (5.76 sq. m) deck space



ZiS

19' 4" (5.89 m) boat length **58** sq. ft. (5.39 sq. m) deck space



Zie

18' 8" (5.69 m) boat length **56** sq. ft. (5.20 sq. m) deck space



17' 4" (5.28

17' 4" (5.28 m) boat length **52** sq. ft. (4.83 sq. m) deck space



From decks to seating to storage to livewells, we've designed each NITRO® performance fishing boat to help optimize your productivity on the water. Here's a detailed breakdown of the interior features of our Z Series flagship boat, the Z21.

1 MINN KOTA® MAXXUM® TROLLING MOTOR

7

21

B

24V, 80-lb. (36.29 kg) thrust, 42" (1.07 m) shaft trolling motor

2 BOW COMMAND CENTER w/trim, fan & navigation light switches, room for optional 12" (30.48 cm) flush-mount fishfinder & tool/drink holder

3 RECESSED FOOT PEDAL for easy & comfortable trolling

4 DUAL-POSITION BICYCLE SEAT BASE Bow deck position for standard bike seat w/hydraulic pedestal

5 NAV LIGHTS INTEGRATED INTO LOW-PROFILE GUNNELS create more interior casting space & no hassle

6 ANTI-FATIGUE BOW DECK PADDING for all-day fishing comfort

7 ROD HOLD-DOWN STRAPS keep rods handy & secure

w/nav light poles

8 4 PULL-UP MOORING CLEATS to reduce possible snags

9 LOCKABLE DUAL ROD STORAGE w/lift assists & port organizer to neatly hold rods & gear up to 8' (2.44 m)

LOCKABLE CENTER STORAGE
 oversized, w/Tackle Management System,
 magnetic lure holders & ventilation fan to
 keep all bow storage compartments dry

10 LOCKABLE DUAL GEAR STORAGE BOXES W/automatic lights

12 TOOL & DRINK HOLDERS on both sides of step-up cooler

13 STEP-UP BOW DECK COOLER
heavily insulated w/trash receptacle
& snap-in sandwich trav

1 INNOVATIVE CONSOLE

W/flush-mounted Lowrance® Elite-7 Ti Combo
fishfinder, room for an optional 12" (30.48 cm)
flush-mount fishfinder, illuminated gauges,
tilt hydraulic steering

15 OPTIONAL REMOVABLE PORT CONSOLE

w/hardware, tinted windscreen & glovebox

(not shown)

16 LARGE PULL-OUT STORAGE DRAWER beneath port console **GRAB HANDLES**

engineered composite handles provide peace of mind

18 NEW Z-CORE™ SEATING SYSTEM w/Force Flex suspension & contoured,

rotomolded frame (driver and passenger seats)

19 BEHIND SEAT NET STOW

easy access to net stored in an unobtrusive location

20 INTEGRATED TOURNAMENT RULER located right next to livewell for faster culling

MOLDED, DROP-IN STORAGE w/lock & tackle tray holders

DELUXEFOLD-DOWN FISHING SEAT BASE
 Aft deck positions for standard bike seat
 w/hydraulic pedestal

23 TWO 19-GAL. (71.92 L) GUARDIAN™ LIVEWELLS

w/anti-slosh lip, freshwater fill pump, recirculator pump, timers, oxygen generation system & pump-out

BATTERY STORAGE AREA w/drop-in trays for gear/tools

25 AUTOMATIC BILGE PUMP to quickly & efficiently remove bilge water

46 HAND-LAID PERFORMANCE HULL for maximum durability & a smooth, dry ride in rough conditions

27 ANGLED, FOLDING BOARDING LADDER accommodates Power-Pole™ or Talon™ mounting

REMOTE OIL FILLmaximizes convenience (OptiMax® only)

RAPID PLANING SYSTEM™ TRANSOM provides superior planing w/little or no bow rise & extreme shallow-water performance

30 RIGGING TUBE for clean & neat cable routing

31 ADJUSTABLE JACK PLATE
8" (20.32 cm) VERADO®
12" (30.48 cm) OPTIMAX®
so you can change the height of the motor for maximum performance w/varying loads

32 BATTERY ON/OFF SWITCH w/emergency jump start







HULL DESIGN REDEFINED

Throughout its history, NITRO® has been known for smooth-riding boats that run dry and stable in rough water—and that fish with the best of them. Now, new design technology is raising the bar, retaining NITRO strength and adding speed, agility and even quicker holeshots. The NITRO Vortex Technology™ (NVT[™]) hull is a revolutionary design that uses a series of parabolic curves instead of traditional strakes. The result is a hull with exceptional top-end speed and lift—plus improved acceleration—all while maintaining superior control and handling. The organic shape of the NVT hull also enhances consistency in the manufacturing process, and provides exceptional strength-to-weight ratio. Available exclusively on the Z17, Z18, Z19 and Z20.

NITRO-EXCLUSIVE RAPID PLANING SYSTEM (RPS) TRANSOM



The Z17, Z18, Z19, Z20, Z21 and ZV21 all feature our exclusive Rapid Planing System $^{\text{\tiny{IM}}}$ (RPS $^{\text{\tiny{IM}}}$) transom. The notch in the center of the transom releases trapped air on takeoff, and the set-back design of the transom delivers maximum water flow to the propeller. The result is a faster holeshot, enhanced performance at the top end and increased overall efficiency.











Boats may be shown with optional equipment.







(189.27 L)

w/Mercury® 200 L OptiMax® Pro XS & Custom Trailer

- 175 L OptiMax® Pro XS
 200 L Verado® Pro FourStroke
 See pg. 62 for all available motors

Fish like a pro with tons of upgrades & extra features, see details on pg. 63



w/Mercury® 200 L OptiMax Pro XS & Custom Trailer

SPECIFICATIONS

(5.89 m)

Boats may be shown with optional equipment.

(2.39 m)

(58.42 cm)

(226.80 kg)

4/500 lbs.

Max. Weight Capacity 1,375 lbs. 50 gal.

Storage Length/Width 22 7"/8 6" (623.69 kg) (6.88 m/2.59 m)







- 2 insulated aft 19-gal. (71.92 L) Guardian™ livewells w/digital timers.
 New digital capacitive touch control pad.
 New Z-Core™ seating system w/Force Flex suspension.







SPECIFICATION

(5.69 m)

(2.39 m)

Boats may be shown with optional equipment.

22.5 (57.15 cm) Max. HP 175 4/550 lbs. (249.48 kg)

40 gal. (151.42 L)

1,350 lbs. (612.35 kg)

Storage Length/Width 21 3"/8 6" (6.48 m/2.59 m)

STANDARD PACKAGE: w/Mercury® 150 L OptiMax® Pro XS & Custom Trailer

• 150 L FourStroke
• 175 L OptiMax® Pro XS
See pg. 64 for all available motors

Now available with Lowrance HDS Carbon upgrade. See pg. 65 for all available options.








New Z-Core™ seating system w/Force Flex suspension.
 Lockable port & starboard bow rod lockers w/lift assists for rods up to 8' (2.44 m).
 NITRO® Vortex Technology™ (NVT™) hull w/Rapid Planing System™ (RPS™) transom.



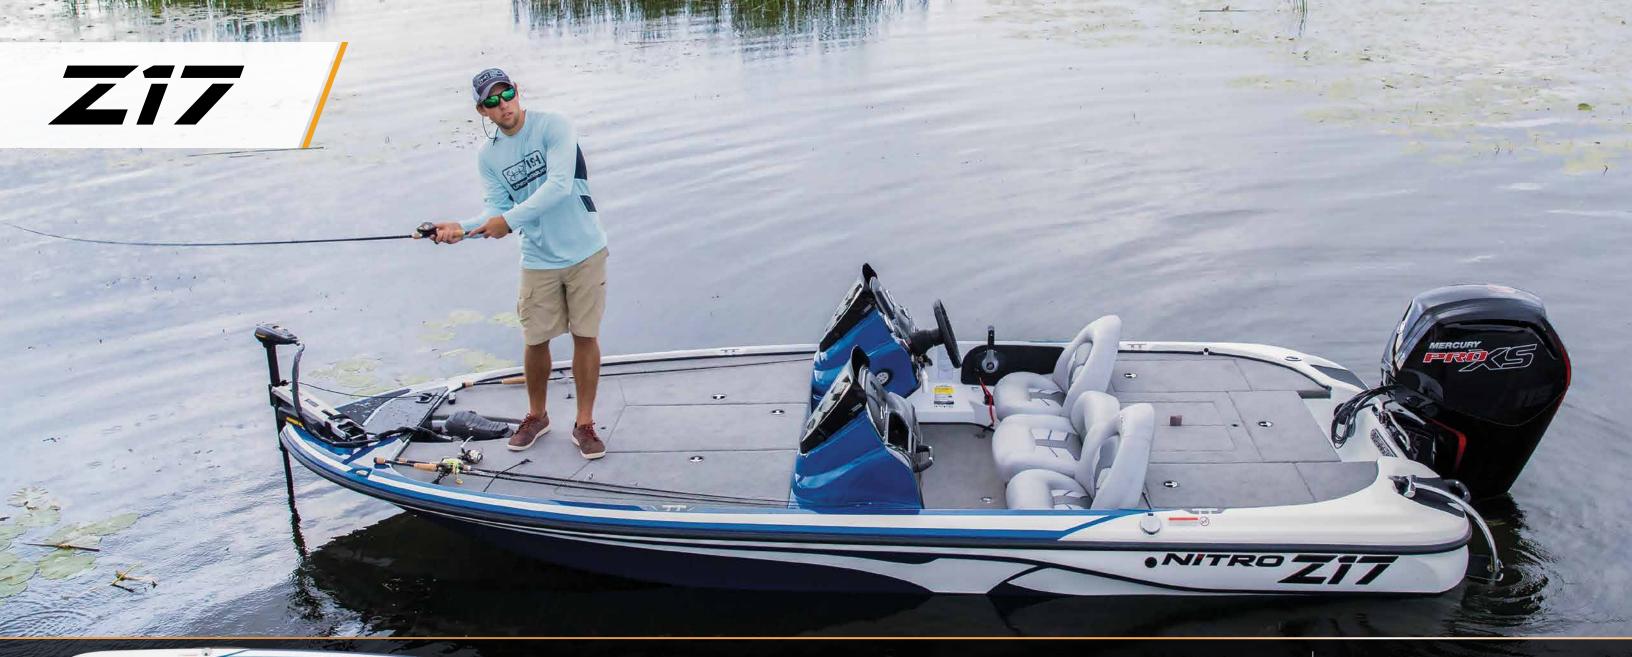



SPECIFICATIONS

(5.28 m)

(2.29 m)

20.5 (52.07 cm) Boats may be shown with optional equipment. Max. HP 115

Max. Person Capacity 3/460 lbs. (208.65 kg)

Fuel Capacity (90.85 L)

(498.95 kg)

Storage Length/Width 20 9"/7" 11.5" (6.32 m/2.43 m) Max. Weight Capacity 1,100 lbs.

w/Mercury® 90 ELPT FourStroke & Custom Trailer

- OPTIONAL MOTORS:

 115 ELPT Pro XS FourStroke

 115 ELPT Pro XS FourStroke CT
 See pg. 66 for all available motors

See pg. 67 for all available options.







Carpeted bow rod boxes store rods up to 7' (2.13 m).
 NITRO® Vortex Technology™ (NVT™) hull w/Rapid Planing System™ (RPS™) transom.
 Gelcoated storage under driver & passenger seats.







26 gal.

(98.42 L)

SPECIFICATIONS

(5.92 m)

(2.36 m)

Boats may be shown with optional equipment.

22" (55.88 cm)

5/750 lbs. (340.19 kg)

(771.10 kg)

Storage Length/Width 21'/8' 3" (6.40 m/2.51 m)

w/Mercury® 150 L FourStroke & Custom Trailer

• 150 L OptiMax® Pro XS
• 175 L OptiMax® Pro XS
• 175 L OptiMax® Pro XS
See pg. 68 for all available motors

Now available with Lowrance HDS Carbon upgrade. See pg. 69 for all available options.



1. Walk-thru windshield & dual consoles w/storage & Bluetooth®-capable stereo. 2. Minn Kota® PowerDrive™ 12V, 55-lb. (24.95 kg), 54" (1.37 m) shaft, foot-controlled trolling motor. 3. 3-across bench seating w/drink holders, removable fishing seats & insulated cooler.







(242.27 L)

w/Mercury® 250 XL OptiMax® Pro XS & Custom Trailer

- 250 XL Verado® Pro FourStroke
- 350 XL Verado®
 9.9 or 15 ELHPT FourStroke CT ProKicker See pg. 70 for all available motors

Fish like a pro with tons of upgrades & extra features, see details on pg. 71



w/Mercury® 250 XL OptiMax Pro XS & Custom Trailer

SPECIFICATIONS

(6.58 m)

(2.54 m)

Boats may be shown with optional equipment.

28" (71.12 cm)

6/1,200 lbs. 64 gal. (544.31 kg)

2,500 lbs. (1,133.98 kg)

Storage Length/Width 24 7 / 8 6 (7.49 m/2.59 m)







1. Dual consoles w/Lowrance® Elite-7 Ti Combo w/GPS & port glovebox (shown w/optional walk-thru windshield). 2. E-Start system allows jump starting the cranking battery w/power from trolling battery. 3. Aft 26-gal. (98.42 L) Guardian™ livewell & bow 5.5-gal. (20.82 L) baitwell.







SPECIFICATIONS

(5.79 m)

(2.59 m)

Boats may be shown with optional equipment.

25" (63.5 cm)

5/1,050 lbs. 45 gal. (476.27 kg)

2,000 lbs. (907.18 kg)

Storage Length/Width 22' 7"/8' 6" (6.88 m/2.59 m)

w/Mercury® 150 XL FourStroke & Custom Trailer

- 150 XL OptiMax® Pro XS
- 200 XL Verado®
 9.9 or 15 ELHPT FourStroke CT ProKicker
 See pg. 70 for all available motors

Now available with Lowrance HDS Carbon upgrade. See pg. 73 for all available options.



1. Aft 26-gal. (98.42 L) Guardian™ livewell & bow 5.5-gal. (20.82 L) baitwell. 2. 3-level center rod locker w/organizers for rods up to 8' (2.44 m). 3. Minn Kota® PowerDrive™ 24V, 70-lb. (31.75 kg) thrust, 60" (1.52 m) shaft, foot-control trolling motor w/Universal Sonar 2.

CUSTOM-MATCHED

UNMATCHED QUALITY OF CONSTRUCTION

Every NITRO® trailer is built from heavy-duty steel tubing protected with our exclusive GALVASHIELD® Impact corrosion and chip protection—a thick, baked on powder coat finish that shields your trailer from the road and the water. This results in an extremely durable finish for maximum longevity through many trips to the lake.

Other features include radial tires, an outboard motor support, safety winch strap on the heavy-duty winch, swing-away tongue, lowmaintenance hubs, safety cables, pivoting tongue jack and more. So, when you're ready to leave home and head to the water, your NITRO boat package is too!



GALVASHIELD® Impact powder coatfinish for improved corrosion and chip protection.



Submersible, angled LED backup lights for long life and improved visibility



COLD-FORMED STEEL FOR EXTRA STRENGTH

GALVANIZED (ZINC COATED) INSIDE & OUT

CONVERSION COAT FOR SUPERIOR ADHESION

GALVASHIELD IMPACT POWDER-COAT FINISH CHIP PROTECTION



Our exclusive GALVASHIELD trailers, with their baked-on powder-coat finish, offer industry-leading warranty protection (3 years) against failure due to corrosion.



CUSTOM WHEELS

18" (45.7 cm) custom matte black aluminum alloy wheel upgrade and Hercules RAPTIS® R-T5 tires and spare. 18" custom silver wheels also available. Available on select models. Must order fiberglass fenders for wheel upgrade.

NO TOUCH VORTEX HUBS W/6-YEAR, 100.000-MILE WARRANTY

All NITRO® trailers come with our No Touch Vortex hub lubrication system, so you no longer need to re-grease or inspect your hubs! These hubs feature a lithium complex fortified with rust and oxidation inhibitors, high-pressure additives and great water resistance. They are also covered by a 100,000-mile or 6-year warranty!

Completely sealed lubrication reservoir permits maximum lubrication.

Easily accessible internal lubrication port fitting.

Threaded cap for twist on/off removal, should the need arise due to an accident.

Internal lubrication channel allows for maximum flushing of the existing lubricant while flushing the system with new lubricant, when the time comes to change grease.



Triple-lip, spring-loaded seal provides improved sealing over

single- and double-lip seals.

SELECT YOUR

NITRO® gelcoat is hand-applied in multiple layers at precise thicknesses by skilled technicians, and the result is a lustrous, highly durable finish that will dazzle onlookers—and last for a lifetime. Chose from over 30 custom colors to make your boat stand out at the lake. Configurations include popular Premium 3-Color, Elite 4-Color and fully customized colors. Literally hundreds of combinations are possible, and our color selector tool online at NITRO.COM will let you see a preview of what your new boat will look like! (Custom colors not available on the Z19 Sport.)















COLOR NO. PR17

COLOR NO. PR24











COLOR NO. EL21



ELITE COLOR OPTIONS AVAILABLE AT NITRO.COM

COLOR NO. EL22

COLOR NO. PR10



COLOR NO. PR12



COLOR NO. PR15



COLOR NO. PR19



COLOR NO. PR21



COLOR NO. PR23

To see more color options, or create your own, visit NITRO.COM.

Z SPORT COLORS 11 MORE Z SPORT COLOR OPTIONS AVAILABLE AT NITRO.COM



6 MORE ZV PREMIUM COLOR OPTIONS AVAILABLE AT NITRO.COM





CUSTOMIZE YOUR BOAT TODAY Choose from hundreds of custom color combinations at NITRO.COM.

CUSTOM COLOR EXAMPLES





AVAILABLE CUSTOM GELCOAT COLORS



CARPET COLORS

NITRO® Premium 3-Color and Elite 4-Color boats come with preselected, matching carpet. Custom color boats come with your choice. See your dealer for details.











YOUR BOAT IS PROTECTED FOR YOUR PEACE OF MIND

NITRO® Boats is dedicated to ensuring you enjoy peace of mind for all your fishing adventures. In addition to using only the best processes to craft boats that will take you through some of the harshest conditions, we also back every model with one of the best factory warranties in the industry. Each boat comes with our transferable warranty that covers the hull, interior stringers and transom for the life of the boat. And they all come with a limited one-year warranty on factory installed components.

STANDARD GEAR AND OPTIONS FROM OUR IKUSTED PARTNER

To ensure that your NITRO® provides industry-leading value and maximum fishability, we pack it full of products from the leaders in the fishing industry.



Mercury® Outboards

We offer a full line of Mercury FourStroke, OptiMax® and Verado® outboards to help power you to the top of the leaderboard.



MININA MOTE

Minn Kota® Trolling Motors

Minn Kota makes the toughest, most innovative trolling motors on the market—and we make them standard on all NITRO models.



LOWRANCE°

Lowrance® Fishfinders

The first and finest marine electronics manufacturer since 1957, installed on every NITRO boat.



NOCO® Genius Chargers

Standard NOCO waterproof battery chargers keep you powered up and ready to fish in the most demanding tournament conditions.



Interstate® Batteries

Interstate batteries provide reliable starting and worry-free trolling for long days on the water—installed standard on all NITRO boats.



Power-Pole™ Anchors

Rock-solid and fast-deploying Power-Pole shallow-water anchors keep you locked in place in up to 10' (3.05 m) of water.

ADDITIONAL OPTIONS

We offer the same options that pros like Kevin VanDam use in their professional tournament careers. From the functional to the aesthetic to the protective, we've got everything you need to join the big leagues.

Comprehensive option availability can be found on pages 58–73 and at NITRO.COM



NITRO® Removable Port Console

Available on all Z Series boats. Easily removable by one person without tools.



Jack Plates

Add speed, stability and fuel economy with hydraulic or manual jack plates.



Minn Kota® Talon™ Anchors

Stay on the fish when you find them with Minn Kota shallow-water anchors.



MotorGuide® Trolling Motors

Powerful and reliable trolling for tournament competition or a weekend at the lake.



Bluetooth®-Capable Stereo

Stream tunes from your phone while you're chasing your next record.



Hot Foot™ Throttle Control

Free up your throttle hand for easier control and better responsiveness.



Humminbird® Fishfinders

A leader in advanced marine electronics. We offer a range of Humminbird products.



Loc-R-Bar® Gear Protection

Provides an extra level of security for your expensive fishing tackle.



Keel Protector

Protect your keel from scratches with a durable keel protector in black or white

| deci righ The sugg desi | this comparison chart to de which NITRO® boat is tor you. usage chart offers gestions aligning with the gn intent of the boat, but or uses are possible. | | | | | | | | |
|-------------------------------------|---|--|--|--|--|---|---|--|--|
| | DESCRIPTION | Z21 | Z20 | Z19 | Z18 | Z17 | Z19 SPORT | ZV21 | ZV18 |
| | Walleye Fishing | X | Х | | | | | X | X |
| * | Muskie/Pike Fishing | X | X | | | | | X | X |
| USAGE* | Bass Fishing | X | X | X | X | X | X | X | X |
| rsn | Watersports | | | | | | X | | X |
| | Tournament Fishing | X | X | X | X | X | | X | X |
| | Big Water (Great Lakes) | X | X | 100 100 100 100 | | | | X | X |
| | Length | 21' 2" (6.45 m) | 20' 2" (6.15 m) | 19' 4" (5.89 m) | 18' 8" (5.69 m) | 17' 4" (5.28 m) | 19' 5" (5.92 m) | 21' 7" (6.58 m) | 18' 11" (5.77 m) |
| S | Beam | 95" (2.41 m) | 96" (2.44 m) | 94" (2.39 m) | 94" (2.39 m) | 90" (2.29 m) | 93" (2.36 m) | 100" (2.54 m) | 102" (2.59 m) |
| TION | Storage Length May Parent Consoity | 24' 4" (7.42 m) | 23' 8" (7.21 m) | 22' 7" (6.88 m) | 21' 3" (6.48 m) | 20' 9" (6.32 m) | 21' (6.40 m) | 24' 7" (7.49 m) | 22' 7" (6.88 m) |
| :ICA: | Max. Person Capacity Max. Weight Capacity | 1 900 lbs (916 47 kg) | 4 1 525 lbs (601 72 kg) | 4 1,375 lbs. (623.69 kg) | 1 350 lbs (612 35 kg) | 3 1,100 lbs. (498.95 kg) | 5 1,700 lbs (771.11 kg) | 6 2 500 lbs (1 122 08 kg) | 2 000 lbs (907.18 kg) |
| SPECIFICATIONS | Fuel Capacity | 1,800 lbs. (816.47 kg) 55 gal. (208.20 L) | 1,525 lbs. (691.73 kg) 55 gal. (208.20 L) | 1,375 lbs. (b23.69 kg) 50 gal. (189.27 L) | 1,350 lbs. (612.35 kg) 40 gal. (151.42 L) | 24 gal. (90.85 L) | 1,700 lbs. (771.11 kg) 26 gal. (98.42 L) | 2,500 lbs. (1,133.98 kg) 64 gal. (242.27 L) | 2,000 lbs. (907.18 kg) 45 gal. (170.34 L) |
| S | Average Weight | 2,150 lbs. (975.22 kg) | 2,000 lbs. (907.18 kg) | 1,850 lbs. (839.15 kg) | 1,700 lbs (771.11 kg) | 1,450 lbs. (657.71 kg) | 1,675 lbs. (759.77 kg) | 2,900 lbs. (1,315.42 kg) | 2,300 lbs. (1,043.26 kg) |
| | Average Weight | 4,050 lbs. (1,837.05 kg) | 4,050 lbs. (1,837.05 kg) | 3,249 lbs. (1,473.72 kg) | 3,200 lbs. (1,451.50 kg) | 2,950 lbs. (1,338.10 kg) | 3,236 lbs. (1,467.83 kg) | 5,500 lbs. (2,494.76 kg) | 4,500 lbs. (2,041.17 kg) |
| | Single Console | X | X | X X | X X | X | -, iso. (i, ior.oo kg) | | ., |
| | Dual Console | | | | | | X | X | X |
| | Walk-Thru Windshield | | | | | | X | Optional | Optional |
| | Removable Port Console | Optional | Optional | Optional | Optional | Optional | | | |
| INTERIOR | Bow Deck Square Footage | 45 (4.18 sq. m) | 38 (3.53 sq. m) | 34 (3.16 sq. m) | 34 (3.16 sq. m) | 32 (2.97 sq. m) | | | |
| Ę | Drainage Channels Around Bow Storage | X | X | X | X | X | Х | X | Х |
| | Rod Storage | 8' (2.44 m) | 8' (2.44 m) | 8' (2.44 m) | 8' (2.44 m) | 7' 6" (2.29 m) | 7' (2.13 m) | 8' (2.44 m) | 8' (2.44 m) |
| | Livewells | Two 19 gal. (71.92 L) | Two 19 gal. (71.92 L) | Two 19 gal. (71.92 L) | 30 gal. (113.56 L) | 23 gal. (87.06 L) | 16 gal. (60.57 L) | 5.5 & 26 gal. (20.82 & 98.42 L) | 5.5 & 26 gal. (20.82 & 98.42 L) |
| | Number of Seats | 5 | 5 | 5 | 4 | 4 | 4 | 5 | 5 |
| S | Standard Mercury® Motor | 225 L OptiMax® Pro XS w/ Torque Master | 200 L OptiMax® Pro XS | 200 L OptiMax® Pro XS | 150 L OptiMax® Pro XS | 115 ELPT Pro XS FourStroke | 150 L OptiMax® Pro XS | 250 XL OptiMax® Pro XS | 150 XL FourStroke |
| R NC | Max. Recommended Horsepower | 300 | 250 | 200 | 175 | 115 | 200 | 350 | 200 |
| WE TR0 | Standard Minn Kota® Trolling Motor | 24V, 80-lb. (36.29 kg) thrust, 42" (1.07 m) | 24V, 80-lb. (36.29 kg) thrust, 42" (1.07 m) | 24V, 70-lb. (31.75 kg) thrust, 42" (1.07 m) | 24V, 70-lb. (31.75 kg) thrust, 42" (1.07 m) | 12V, 55-lb. (24.95 kg) thrust, 42" (1.07 m) | 12V, 55-lb. (24.95 kg) thrust, 54" (1.37 m) | 36V, 112-lb. (50.80 kg) thrust, 60" (1.52 m) | 24V, 70-lb. (31.75 kg) thrust, 60" (1.52 m) |
| POV | Standard Lowrance® Fishfinder | Elite-7 Ti w/GPS | H00K-5x | HOOK-5x | HOOK-5x | HOOK-4x | HOOK-5x | Elite-7 Ti w/GPS | HOOK-5x |
| | Optional Fishfinders | 12" (30.48 cm) Bow & Console | 9" (22.86 cm) Bow & Console | 9" (22.86 cm) Bow & Console | 12" (30.48 cm) Bow & Console | 12" (30.48 cm) Bow & Console |

^{*}The usage category consists of suggestions only. Our boats are built to be highly versatile and very capable in a variety of situations. These suggestions are just a starting point. Boats may be shown with optional equipment.



Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations and features

| HULL LENGTH | | | | |
|------------------------|----------|--|--|--|
| 21 ′ 2 ″ | (6.45 m) | | | |
| MAX. PERSON CAPACITY | | | | |

BEAM 95" (2.41 m)

FUEL CAPACITY

55 gal. (208.20 L)

TRANSOM HEIGHT **22.5**" (57.15 cm)

MAX. HP 300

MAX. WEIGHT CAPACITY **1.800 lbs.** (816.47 kg)

STORAGE LENGTH **24' 4"**(7.42 m)

SPECIFICATIONS

4/825 lbs. (374.21 kg)

| ı | Bottom width | 74" (1.88 m) |
|---|------------------------|--------------------------|
| | Depth inside | 18.5" (46.99 cm) |
| | Deadrise | 16 degrees |
| | Draft | 16" (40.64 cm) |
| - | Average weight | 2,150 lbs. (975.22 kg) |
| | Average package weight | 4,050 lbs. (1,837.05 kg) |
| | Package width | 8' 6" (2.59 m) |

MOTOR OPTIONS

| MERCURY® MOTOR | EST. SPEED (MPH) |
|--|---------------------|
| 225 L OptiMax® Pro XS w/Torque Master | 66–68 |
| 250 L OptiMax® Pro XS w/Torque Master | 70–72 |
| 300 L OptiMax® Pro XS w/Torque Master | 73–75 |
| 250 L Verado® Pro FourStroke | 69–71 |
| 300 L Verado® Pro FourStroke | 73–75 |
| Estimated speeds are variable, depending o | n load, passengers, |

elevation, weather and water conditions.

Boat may be shown with ontional equipment Specs and features subject to change without notice.

STANDARD FEATURES



COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA® certified
- Flotation meets or exceeds NMMA® & U.S. Coast Guard Requirements
- EPA-compliant fuel system Anti-fatigue, padded comfort bow deck
- Non-skid mats bow & stern
- Remote oil fill (OptiMax® motors only)
- Spare prop holder
- 5 drink holders
- 4 stainless steel pull-up cleats
- Integrated fold-down stainless steel reboarding ladder, angled for allowing optional shallow-water anchor
- 4 grab handles (1 at each seat)
- Built-in tournament ruler & holder
- Fire extinguisher
- Horn - Paddle



(A) CONSOLE

- NEW console design w/2" (5.08 cm) additional leg room
- Flush-mounted Lowrance® Elite-7 Ti Combo fishfinder w/GPS
- Hydraulic steering w/tilt
- Removable acrylic, tinted windscreen
- Ready to accept optional removable port console
- Custom-molded modular console w/2-tone gelcoat
- Veethree® multi-function instrumentation w/speedometer/fuel gauge, tach/trim gauge, water pressure gauge & oil level indicator
- Digital switch panel w/blue backlight & soft-touch shroud
- Dash light dimmer
- Waterproof digital switches
- LED courtesy light
- Below-console RAM® X-Grip® phone holder & 12V outlet

CONSTRUCTION & EXTERIOR

- NEW 100% composite deck core w/superior thermal stability & strength-to-weight ratio Deck & hull chemically bonded & mechanically fastened w/stainless steel fasteners every
- 2" (5.08 cm)
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Low-profile gunnels to maximize deck size & for easier casting



ELECTRICAL

- E-Start emergency jump start system
- Bow panel w/trolling motor receptacle, anchor/light switch, trim switch & capability to flush mount 12" (30.48 cm) graph

- 1,600 GPH (6,056.66 LPH) bilge pump
- Automatic bilge
- LED console courtesy light
- Bow navigation lights integrated into gunnels w/stowable stern light
- Manual LED-lighted bow storage
- Automatic LED-lighted starboard bow rod storage
- Automotive-style labeled fuse panel w/cover
- Interstate® 27M-XHD cranking battery
- 2 heavy-duty Interstate® Series 29 trolling batteries
- 3-bank, 30-amp onboard battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker
- Master Power Switch
- Ventilation fan system in bow storage
- Waterproof Deutsch plugin gauge connectors
- Water/abrasion-resistant connectors

INTERIOR

- NEW Z-Core™ seating system w/Force Flex suspension & contoured, rotomolded frame (driver & passenger seats) Adjustable sliding driver & passenger seats w/removable center seat cushion
- 45-sq.-ft., (4.2-sq.-m) anti-fatigue, padded bow deck for comfort & mobility
- Step-up to bow deck w/86-qt. (81.39 L) insulated cooler, removable trash receptacle & snan-in sandwich trav
- Bike seat w/hydraulic pedestal
- Folding fishing seat w/composite frame & hydraulic pedestal
- Designated net storage behind seating
- Trolling motor pedal recess for Minn Kota® & MotorGuide® trolling motors
- Oversized, lockable port & starboard bow rod lockers w/lift assists for rods up to 8' (2.44 m)
- Rod organizer in port rod locker
- Molded-in drainage channels around bow storage compartments
- Port & starboard bow rod hold-down straps
- Oversized lockable center bow storage locker w/Tackle Management System
- Center bow magnetic under-lid lure organizer
- 2 large, lockable center bow storage lockers w/lift assists
- Partner rod ramp w/rod handle organizer & hold-down strap
- Port below-console pull-out storage drawer
- 1 lift-out, molded aft port storage box that will accept four 3700 tackle trays w/propeller under storage
- 1 lift-out, molded aft starboard storage box that will accept seven 3700 tackle trays
- Molded utility rigging compartment w/lift-out tool/rope storage tray
- Molded utility rigging compartment for easy access to batteries & pumps & easy cleanup
- 24-oz. (.68 kg) plush, marine-grade cut pile carpet on deck & floor
- Stainless steel lockable compression latches Footrest w/non-skid mat under console(s)
- Insulated aluminum lids w/welded corners

STANDARD FEATURES CONT'D



- Oxygen generator in each livewell
- PERFORMANCE

 - 8" (20.32 cm) adjustable jack plate (Verado® only)

 - Rigging tube for organized wiring & abrasion resistance
 - Stainless steel propeller

- Custom-fit, tandem-axle NITRO® trailer w/powder-coat finish & GALVASHIELD® Impact corrosion & chip protection for improved durability
- NEW 7-pin connector

water anchors

w/Universal Sonar 2

- Humminbird® HELIX™ 9 SI G2 w/GPS (RAM mounted) NEW bow Lowrance® Elite-9 Ti gimbal mounted fishfinder
 - Humminbird® HELIX™ 10 SI G2 w/GPS (RAM mounted)

ELECTRONICS

- Bluetooth®-capable Sony® stereo system

- Hot Foot™ (non-Verado® motors only) Hot Foot™ (Verado® motors only)

- Stealth 1, 20-amp battery charger w/out gauge
- 2 oxygen generators w/shut-off switch
- CoolGuard™ livewell cooling system (factory installed only)
- Power-adjust pneumatic lumbar support for driver's seat
- 2 bike seats (exchange)
- 2 jump seats (exchange)
- **FUNCTIONAL** Custom color option
- Elite 4-color option
- Snap-in cockpit mat
- Carpet embroidery
- Spinning rod organizer
- SmartCraft® gauges
- Sarasota electric lid latches
- Removable port console & hardware (factory installed)
- 6" (15.24 cm) BMS hydraulic jack plate (available
- w/Verado® motors only)
- 12" (30.48 cm) Atlas hydraulic jack plate (not available w/Verado® motors)
- 12" (30.48 cm) BMS hydraulic jack plate (not available w/Verado® motors
- Minn Kota® 8' (2.44 m) Talon shallow-water anchor (dealer installed)
- 2 Minn Kota® 8' (2.44 m) Talon shallow-water anchors (dealer installed)
- Minn Kota® 12' (3.66 m) Talon shallow-water anchor (dealer installed)
- 2 Minn Kota® 12' (3.66 m) Talon shallow-water anchors (dealer installed) - Power-Pole® Blade 8' (2.44 m) shallow-water anchor (dealer
- installed) - 2 Power-Pole® Blade 8' (2.44 m) shallow-water anchors
 - (dealer installed) - Power-Pole® Blade 10' (3.05 m) shallow-water anchor
- (dealer installed)
- 2 Power-Pole® Blade 10' (3.05 m) shallow-water anchors (dealer installed)

LIVEWELL SYSTEMS

- 2 insulated aft 19-gal. (71.92 L) Guardian™ livewells w/digital timers
- 750 GPH (2,839.06 LPH) livewell recirculation/pump-out system
- 500 GPH (1,892.71 LPH) aerator/fill pump
- Dual remote drain controls
- Rotomolded w/rounded corners
- 16° variable deadrise hull
- Rapid Planing System™ (RPS™) for quicker holeshots & maximized speed
- 12" (30.48 cm) adjustable jack plate (OptiMax® only)

Z-PRO PACKAGE (w/Package, other standard features

NEW console Lowrance® Elite-12 Ti flush mounted

(1.14 m) shaft, foot-control trolling motor

NEW T-H Marine livewell culling system

NEW cable trolling motor handle

- Factory-applied keel protector

2 automatic bilge pumps
 1 extra SRM29 trolling battery

BOW GRAPH

or RAM mounted)

or RAM mounted)

or RAM mounted)

- 4-bank, 40-amp battery charger

Hot Foot™ throttle & Pro-Trim lever

- 31M-AGM cranking battery upgrade

- Lowrance® Elite-7 Ti (flush or RAM mounted)

- Lowrance® HDS-7 Carbon w/StructureScan® (flush

- Lowrance® HDS-9 Carbon w/StructureScan® (flush

- Lowrance® HDS-12 Carbon w/StructureScan® (flush

- NEW 2 Power-Pole® 8' (2.44 m) Blade Edition shallow-

Minn Kota® Fortrex® 36V, 112-lb. (50.80 kg) thrust, 45"

- NEW power-adjust pneumatic lumbar support for driver's

TRAILER

OPTIONS

or options may not be available

- Humminbird® HELIX™ 7 SI G2 (RAM mounted)
- Humminbird® HELIX™ 12 SI G2 w/GPS (RAM mounted)

- **PERFORMANCE & STEERING**
- Trim lever on wheel (not available w/Verado® motors)
- **BATTERY CHARGER EXCHANGE** - 4-bank, 40-amp battery charger
- Dual Pro® international battery charger

- Stealth 1, 20-amp battery charger w/gauge

- **HARDWARE & EQUIPMENT**
- 2 automatic bilge pumps
- HvdroWave® electronic fish attractor
- Keel protector (Black or White)
- Line spooler - Loc-R-Bar® w/alarm
- **CUSHIONS & SEATING**
- Humminbird® HELIX™ 7 SI G2 (RAM mounted) Humminbird® HELIX™ 9 SI G2 w/GPS (RAM mounted)
- Humminbird® HELIX™ 10 SI G2 w/GPS (RAM mounted) Humminbird® HELIX™ 12 SI G2 w/GPS (RAM mounted)
- **DASH GRAPH EXCHANGE** Lowrance[®] Elite-7 Ti (uninstalled)

Humminbird® HELIX™ 7 DI G2 (flush mounted)

- Lowrance® HDS-7 Carbon w/StructureScan® (flush or RAM mounted or uninstalled) - Lowrance® HDS-9 Carbon w/StructureScan® (flush
- or RAM mounted, or uninstalled) - Lowrance® HDS-12 Carbon w/StructureScan® (flush or RAM mounted, or uninstalled)

Humminbird® HELIX™ 7 DI G2 (flush mounted)

- Humminbird® HELIX™ 7 SI G2 (gimbal, flush or RAM mounted or uninstalled) Humminbird® HELIX™ 9 SI G2 w/GPS (gimbal, flush or RAM
- mounted, or uninstalled) Humminbird® HELIX™ 10 SI G2 w/GPS (gimbal, flush or RAM mounted, or uninstalled) Humminbird® HELIX™ 12 SI G2 w/GPS (gimbal, flush or RAM
- mounted, or uninstalled) 2ND DASH GRAPH

(RAM mounted)

(RAM mounted)

- Lowrance® Elite-7 Ti (RAM mounted) Lowrance® HDS-7 Carbon w/StructureScan®
- (RAM mounted) - Lowrance® HDS-9 Carbon w/StructureScan®
- Humminbird® HELIX™ 7 DI G2 (RAM mounted)

Lowrance® HDS-12 Carbon w/StructureScan®

No Touch Vortex hub lubrication system w/6-yr. 100,000-mile limited warranty

Integrated winch stand step w/safety handle for easier boarding/reboarding at bow while

Minn Kota® Maxxum® 24V, 80-lb. (36.29 kg) thrust, 42" (1.07 m) shaft, foot-control trolling

- Surge disc brakes on 1 axle

boat is on trailer

Safety cables

Submersible LED lights

TROLLING MOTOR

Spare tire carrier w/matching spare

All-welded rectangular GALVASHIELD® frame

- 14" (35.56 cm) custom aluminum wheels w/radial tires

Space-saving swing-away tongue to reduce storage length

1,600-lb. (725.75 kg) swing-up locking jack w/swivel wheel

Outboard motor support to reduce hull & transom stress while towing

Heavy-duty winch w/nylon strap & bow safety strap

Fiberglass fender design w/integrated back-up lights

Carpeted bunks & fender boards to protect hull

- TROLLING MOTOR Minn Kota[®] Fortrex[®] 24V, 80-lb. (36.29 kg) thrust, 45"
- (1.14 m) shaft trolling motor w/Universal Sonar 2 Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg) thrust, 52"
- (1.32 m) shaft trolling motor w/Universal Sonar 2 Minn Kota® Fortrex® 36V, 112-lb. (50.80 kg) thrust, 45"
- (1.14 m) shaft trolling motor w/Universal Sonar 2 Minn Kota® Fortrex® 36V, 112-lb. (50.80 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2
- Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot - Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 52"
- (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 45"
- (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot Link Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 52"
- (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot Link MotorGuide® X5 36V, 105-lb. (47.63 kg) thrust, 45" (1.14 m) shaft trolling motor

MotorGuide® X5 36V, 105-lb. (47.63 kg) thrust, 50" (1.27 m) shaft trolling motor

- **COVERS**
- Rope ratchet cover for side or dual consoles—Charcoal - Pro Series 2-tone rope ratchet cover for side or dual consoles—Black & White
- Minn Kota® Fortrex® trolling motor rope ratchet cover for side or dual consoles—Charcoal Minn Kota® Fortrex® trolling motor Pro Series 2-tone rope

- ratchet cover for side or dual consoles-Black & White **TRAILER**
- 18" (45.72 cm) custom silver machined aluminum wheel upgrade & Hercules RAPTIS R-T5 spare tire

18" (45.72 cm) custom matte Black aluminum alloy wheel

upgrade & Hercules RAPTIS R-T5 spare tire Retractable trailer tie downs - Tandem-axle 2 brake

See dealer for more details.



BEAM HULL LENGTH 20' 2" (6.15 m) **96**" (2.44 m)

TRANSOM HEIGHT **22**" (55.88 cm)

MAX. HP 250

FUEL CAPACITY 55 gal. (208,20 L)

STORAGE LENGTH MAX. WEIGHT CAPACITY **23**′ **8**″(7.21 m) **1.525 lbs.** (691.73 kg)

SPECIFICATIONS

MAX. PERSON CAPACITY

4/575 lbs. (260,82 kg)

| Bottom width | 75" (2.08 m) |
|------------------------|--------------------------|
| Depth inside | 18" (45.72 cm) |
| Deadrise | 16 degrees |
| Draft | 16" (40.64 cm) |
| Average weight | 2,000 lbs. (907.18 kg) |
| Average package weight | 4,050 lbs. (1,837.05 kg) |

MOTOR OPTIONS

| MERCURY® | MOTOR | EST. SPEED (MPH) | | |
|----------------|--|------------------|--|--|
| 200 L OptiMax® | Pro XS | 65–67 | | |
| 225 L OptiMax® | Pro XS w/Torque Master | 69–71 | | |
| 250 L OptiMax® | Pro XS w/Torque Master | 72–74 | | |
| | Estimated speeds are variable, depending on load, passengers, elevation, weather and water conditions. | | | |

Boat may be shown with optional equipment.

Specs and features subject to change without notice.

STANDARD FEATURES



Package width

COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA® certified
- Flotation meets or exceeds NMMA® & U.S. Coast Guard Requirements - EPA-compliant fuel system
- Anti-fatigue, padded comfort bow deck
- Non-skid mats bow & stern
- Remote oil fill (OptiMax® motors only)
- Spare prop holder
- 5 drink holders
- 4 stainless steel pull-up cleats
- Integrated fold-down stainless steel reboarding ladder, angled for allowing optional shallow-water anchor

8' 6" (2.59 m)

- 4 grab handles (1 at each seat)
- Built-in tournament ruler & holder
- Fire extinguisher
- Horn - Paddle



(A) CONSOLE

- NEW console design w/2" (5.08 cm) additional leg room
- Flush-mounted Lowrance® HOOK-5x fishfinder w/surface temperature & down imaging
- Hydraulic steering w/tilt
- Removable acrylic, tinted windscreen
- Ready to accept optional removable port console
- Custom-molded modular console w/2-tone gelcoat
- Veethree® multi-function instrumentation w/speedometer/fuel gauge, tach/trim gauge, water pressure gauge & oil level indicator
- Digital switch panel w/blue backlight & soft-touch shroud
- Dash light dimmer
- Waterproof digital switches
- LED courtesy light
- 12V outlet

CONSTRUCTION & EXTERIOR

- NEW 100% composite deck core w/superior thermal stability & strength-to-weight ratio - Deck & hull chemically bonded & mechanically fastened w/stainless steel fasteners every
- 2" (5.08 cm)
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Low-profile gunnels to maximize deck size & for easier casting



ELECTRICAL

- E-Start emergency jump start system
- Bow panel w/trolling motor receptacle, anchor/light switch, trim switch & capability to flush mount 12" (30.48 cm) graph

- 1,600 GPH (6,056.66 LPH) bilge pump
- LED console courtesy light
- Bow navigation lights integrated into gunnels w/stowable stern light
- Manual LED-lighted bow storage
- Automatic LED-lighted starboard bow rod storage Automotive-style labeled fuse panel w/cover
- Interstate® 27M-XHD cranking battery
- 2 heavy-duty Interstate® Series 29 trolling batteries
- 2-bank, 8-amp battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker
- Master Power Switch
- Ventilation fan system in bow storage
- Waterproof Deutsch plugin gauge connectors
- Water/abrasion-resistant connectors

INTERIOR

- NEW Z-Core™ seating system w/Force Flex suspension & contoured, rotomolded frame (driver & passenger seats)
- Adjustable sliding driver seat
- 38-sq.-ft. (3.5-sq.-m) anti-fatique, padded bow deck for comfort & mobility
- Step-up to bow deck w/74-qt. (70.03 L) insulated cooler, removable trash receptacle & snan-in sandwich trav
- Rike seat w/nedestal
- Folding fishing seat w/composite frame
- Designated net storage behind seating
- Trolling motor pedal recess for Minn Kota® & MotorGuide® trolling motors Oversized, lockable port & starboard bow rod lockers w/lift assists for rods up to 8' (2.44 m)
- Rod organizer in port rod locker
- Molded-in drainage channels around bow storage compartments
- Port & starboard bow rod hold-down straps
- Oversized lockable center bow storage locker w/Tackle Management System
- Partner rod ramp w/rod handle organizer & hold-down strap
- 1 lift-out, molded aft port storage box that will accept four 3700 tackle trays w/propeller
- 1 lift-out, molded aft starboard storage box that will accept seven 3700 tackle trays
- Molded utility rigging compartment w/lift-out tool/rope storage tray
- Molded utility rigging compartment for easy access to batteries & pumps & easy cleanup
- 24-oz. (.68 kg) plush, marine-grade cut pile carpet on deck & floor Stainless steel lockable compression latches
- Footrest w/non-skid mat under console(s)
- Insulated aluminum lids w/welded corners

STANDARD FEATURES CONT'D



LIVEWELL SYSTEMS

- 2 insulated aft 19-gal. (71.92 L) Guardian™ livewells w/digital timers
- 750 GPH (2,839.06 LPH) livewell recirculation/pump-out system
- 500 GPH (1.892.71 LPH) aerator/fill pump
- Dual remote drain controls
- Rotomolded w/rounded corners

PERFORMANCE

- NITRO® Vortex Technology™ (NVT™) hull for a smoother, drier ride
- Rapid Planing System™ (RPS™) for quicker holeshots & maximized speed
- 12" (30.48 cm) adjustable jack plate (OptiMax® only)
- Rigging tube for organized wiring & abrasion resistance
- Stainless steel propeller



- Custom-fit, tandem-axle NITRO® trailer w/powder-coat finish & GALVASHIELD® Impact
- corrosion & chip protection for improved durability
- Surge disc brakes on 1 axle

- Inside the frame brake line system w/1-point bleed
- 14" (35.56 cm) custom aluminum wheels w/radial tires
- No Touch Vortex hub lubrication system w/6-yr. 100,000-mile limited warranty
- Spare tire carrier w/matching spare
- All-welded rectangular GALVASHIELD® frame
- Space-saving swing-away tongue to reduce storage length
- 1,200-lb. (544.31 kg) swing-up locking jack w/swivel wheel
- Heavy-duty winch w/nylon strap & bow safety strap
- Integrated winch stand step w/safety handle for easier boarding/reboarding at bow while boat is on trailer
- Outboard motor support to reduce hull & transom stress while towing
- Carpeted bunks & fender boards to protect hull
- Submersible LED lights
- Safety cables



TROLLING MOTOR

Minn Kota® Maxxum® 24V, 80-lb. (36.29 kg) thrust, 42" (1.07 m) shaft, foot-control trolling

(dealer installed)

OPTIONS

- **Z-PRO PACKAGE** (w/Package, other standard features
- NEW bow Lowrance® Elite-9 Ti gimbal mounted fishfinder NEW console Lowrance® Elite-12 Ti flush mounted
- fishfinder - NEW 2 Power-Pole® 8' (2.44 m) Blade Edition shallow-
- water anchors Minn Kota® Fortrex® 36V, 112-lb. (50.80 kg) thrust, 45" (1.14 m) shaft, foot-control trolling motor w/Universal
- Sonar 2 NEW cable trolling motor handle
- NEW power-adjust pneumatic lumbar support for driver's
- NEW T-H Marine livewell culling system
- Factory-applied keel protector
- 4-bank, 40-amp battery charger Bow tool/drink holder
- Hot Foot™ throttle & Pro-Trim lever
- 1 automatic bilge pump - 1 extra SRM29 trolling battery
- 31M-AGM cranking battery upgrade

BOW GRAPH

- Lowrance® HOOK-5 (flush mounted)
- Lowrance® Elite-7 Ti (flush or RAM mounted) - Lowrance® HDS-7 Carbon w/StructureScan® (flush or RAM mounted)
- Lowrance® HDS-9 Carbon w/StructureScan® (flush or RAM mounted) - Lowrance® HDS-12 Carbon w/StructureScan® (flush
- or RAM mounted)
- Humminbird® HELIX™ 7 DI G2 (flush mounted) - Humminbird® HELIX™ 7 SI G2 (RAM mounted)
- Humminhird® HELIX™ 9 SLG2 w/GPS (BAM mounted)
- Humminbird® HELIX™ 10 SI G2 w/GPS (RAM mounted)

DASH GRAPH EXCHANGE

or RAM mounted, or uninstalled)

- Lowrance® Elite-7 Ti (flush or RAM mounted, or uninstalled) - Lowrance® HDS-7 Carbon w/StructureScan® (flush
- or RAM mounted, or uninstalled)
- Lowrance® HDS-12 Carbon w/StructureScan® (flush
- Humminbird® HELIX™ 7 DI G2 (flush mounted)
- Humminbird® HELIX™ 9 SI G2 w/GPS (gimbal, flush or RAM)
- mounted or uninstalled) - Humminbird® HELIX™ 10 SI G2 w/GPS (gimbal, flush or RAM
- Humminbird® HELIX™ 12 SI G2 w/GPS (gimbal, flush or RAM mounted, or uninstalled)

- Lowrance® Elite-7 Ti (RAM mounted)
- Lowrance® HDS-7 Carbon w/StructureScan® (RAM mounted)
- (RAM mounted) Lowrance® HDS-12 Carbon w/StructureScan®
- (RAM mounted)

- Humminbird® HELIX™ 9 SI G2 w/GPS (RAM mounted)
- Humminbird® HELIX™ 12 SI G2 w/GPS (RAM mounted)

- Bluetooth®-capable Sony® stereo system

PERFORMANCE & STEERING

- Hot Foot™ (Verado® motors only)
- Trim lever on wheel (not available w/Verado® motors) **BATTERY CHARGER EXCHANGE**
- 3-bank, 30-amp battery charger
- Dual Pro® international battery charger
- Emergency start system
- Stealth 1, 20-amp battery charger w/gauge
- **HARDWARE & EQUIPMENT**
- 2 oxygen generators - 2 oxygen generators w/shut-off switch
- Bow tool/drink holder
- Hydraulic pedestal (exchange)
- Keel protector (Black or White)
- Loc-R-Bar® w/alarm
- Port under-deck storage drawer

Humminbird® HELIX™ 12 SI G2 w/GPS (RAM mounted)

- Lowrance® HDS-9 Carbon w/StructureScan® (flush
- or RAM mounted, or uninstalled)
- Humminbird® HELIX™ 7 SI G2 (gimbal, flush or RAM mounted, or uninstalled)
- mounted, or uninstalled)

2ND DASH GRAPH

- Lowrance® HDS-9 Carbon w/StructureScan®

- Humminbird® HELIX™ 7 DI G2 (RAM mounted)
- Humminbird® HELIX™ 7 SI G2 (RAM mounted)
- Humminbird® HELIX™ 10 SI G2 w/GPS (RAM mounted)

ELECTRONICS

- Hot Foot™ (non-Verado® motors only)
- 2-bank, 20-amp battery charger
- 4-bank, 40-amp battery charger
- Stealth 1, 20-amp battery charger w/out gauge
- Automatic bilge pump
- CoolGuard[™] livewell cooling system (factory installed only)
- HydroWave® electronic fish attractor

- X-Grip® phone holde

- **CUSHIONS & SEATING**
- Bow filler insert - 2 bike seats (exchange)
- 2 jump seats (exchange)

Adjustable passenger seat

- Center seat - Hydraulic pedestal (exchange)
- **FUNCTIONAL** Custom color option

installed)

- Snap-in cockpit mat

SmartCraft® gauges

- Carpet embroidery Spinning rod organizer
- Removable port console & hardware (factory installed) 12" (30.48 cm) Atlas hydraulic jack plate (not available w/Verado® motors)
- 12" (30.48 cm) BMS hydraulic jack plate (not available w/Verado® motors) Minn Kota® 8' (2.44 m) Talon shallow-water anchor (dealer
- 2 Minn Kota® 8' (2.44 m) Talon shallow-water anchors (dealer installed) - Minn Kota® 12' (3.66 m) Talon shallow-water anchor (dealer
- installed) - 2 Minn Kota® 12' (3.66 m) Talon shallow-water anchors (dealer installed)
- Power-Pole® Blade 8' (2.44 m) shallow-water anchor (dealer installed)

- 2 Power-Pole® Blade 8' (2.44 m) shallow-water anchors (dealer installed)
- Power-Pole® Blade 10' (3.05 m) shallow-water anchor

(dealer installed) 2 Power-Pole® Blade 10' (3.05 m) shallow-water anchors

- TROLLING MOTOR
- (1.14 m) shaft trolling motor w/Universal Sonar 2 Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg) thrust, 52"
- Minn Kota® Fortrex® 36V, 112-lb. (50.80 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2
- (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot
- (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot
- Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot Link
- shaft trolling motor MotorGuide® X5 36V, 105-lb. (47.63 kg) thrust, 45" (1.14 m) shaft trolling motor - MotorGuide® X5 36V, 105-lb. (47.63 kg) thrust, 50" (1.27 m)

MotorGuide® X5 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m)

- Rope ratchet cover for side or dual consoles—Charcoal Pro Series 2-tone rope ratchet cover for side or dual
- consoles—Black & White Minn Kota® Fortrex® trolling motor rope ratchet cover for

ratchet cover for side or dual consoles—Black & White

- **TRAILER** - 18" (45.72 cm) custom silver machined aluminum wheel upgrade & Hercules RAPTIS R-T5 spare tire (must order
- 18" (45.72 cm) custom matte Black aluminum alloy wheel upgrade & Hercules RAPTIS R-T5 spare tire (must order
- fiberglass fenders) Fiberglass fenders for tandem-axle trailer

See dealer for more details

Tandem-axle 2 brake

Retractable trailer tie downs

fiberglass fenders)

2018 | NITRO.COM | 61



- (1.32 m) shaft trolling motor w/Universal Sonar 2
- Minn Kota® Fortrex® 36V, 112-lb. (50.80 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2 Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 45"
- Minn Kota® Ultrex® 36V. 112-lb. (50.80 kg) thrust. 52"
- Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot Link

shaft trolling motor

- **COVERS**
- side or dual consoles—Charcoal Minn Kota® Fortrex® trolling motor Pro Series 2-tone rope



Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations and features

| HULL LENGTH 19'4" (5.89 m) | BEAM 94 " (2.39 m) |
|----------------------------|---------------------------|
| MAX. PERSON CAPACITY | FUEL CAPACIT |

APACITY

4/500 lbs. (226.80 kg) 50 dal. (189.27 l)

8' 6" (2.59 m)

MAX. HP 200

MAX. WEIGHT CAPACITY 1.375 lbs. (623,69 kg)

TRANSOM HEIGHT

23" (58,42 cm)

STORAGE LENGTH **22**′ **7**″(6.88 m)

SPECIFICATIONS

| 74" (1.88 m) | Bottom width |
|--------------------------|------------------------|
| 18.5" (46.99 cm) | Depth inside |
| 16 degrees | Deadrise |
| 16" (40.64 cm) | Draft |
| 1,850 lbs. (839.15 kg) | Average weight |
| 3,249 lbs. (1,473.72 kg) | Average package weight |
| | |

MOTOR OPTIONS

| MERCURY® MOTOR | EST. SPEED (MPH) |
|------------------------------|------------------|
| 150 L OptiMax® Pro XS | 56–58 |
| 175 L OptiMax® Pro XS | 62–63 |
| 200 L OptiMax® Pro XS | 68–70 |
| 200 L Verado® Pro FourStroke | 65–66 |
| Est and the state of | |

Estimated speeds are variable, depending on load, passengers. elevation, weather and water conditions.

Boat may be shown with optional equipment. Specs and features subject to change without notice.



STANDARD FEATURES



Package width

COMFORT, CONVENIENCE & PEACE OF MIND

- NNMMA® certified
- Flotation meets or exceeds NMMA® & U.S. Coast Guard Requirements
- EPA-compliant fuel system Non-skid mats bow & stern
- 6 drink holders
- 4 stainless steel pull-up cleats
- Integrated fold-down stainless steel reboarding ladder, angled for allowing optional shallow-water anchor
- 4 grab handles (1 at each seat)
- Built-in tournament ruler & holder
- Fire extinguisher
- Horn - Paddle



A CONSOLE

- NEW capacitive touch keypad
- Flush-mounted Lowrance® HOOK-5x fishfinder w/surface temperature & down imaging
- Hydraulic steering w/tilt
- Removable acrylic, tinted windscreen
- Ready to accept optional removable port console
- Custom-molded modular console w/2-tone gelcoat
- Veethree® multi-function instrumentation w/speedometer/fuel gauge, tach/trim gauge,
- voltmeter gauge & water pressure gauge
- Dash light dimmer
- LED courtesy light 12V outlet

2" (5.08 cm)



CONSTRUCTION & EXTERIOR

- NEW 100% composite deck core w/superior thermal stability & strength-to-weight ratio Deck & hull chemically bonded & mechanically fastened w/stainless steel fasteners every
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Low-profile gunnels to maximize deck size & for easier casting

ELECTRICAL

- Bow panel w/trolling motor receptacle, anchor/light switch, trim switch & capability to flush $\,$ mount 12" (30.48 cm) graph
- 1,000 GPH (3,785.41 LPH) bilge pump
- LED console courtesy light
- Bow navigation lights integrated into gunnels w/stowable stern light
- Manual LED-lighted bow storage
- Automotive-style labeled fuse panel w/cover
- Interstate® 27M-XHD cranking battery

- 2 heavy-duty Interstate® Series 29 trolling batteries
- 2-bank, 8-amp battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker
- Master Power Switch
- Waterproof Deutsch plugin gauge connectors
- Water/abrasion-resistant connectors

INTERIOR

- NEW Z-Core™ seating system w/Force Flex suspension & contoured, rotomolded frame (driver & passenger seats)
- · 34-sq.-ft. (3.2-sq.-m) bow deck for casting mobility w/lots of storage
- Step-up to bow deck w/62-qt. (58.67 L) insulated cooler & removable trash receptacle
- Bike seat w/pedestal
- Folding fishing seat w/composite frame
- Designated net storage behind seating
- Trolling motor pedal recess for Minn Kota® & MotorGuide® trolling motors
- Oversized, lockable port & starboard bow rod lockers w/lift assists for rods up to 8' (2.44 m)
- Molded-in drainage channels around bow storage compartments
- Port & starboard bow rod hold-down straps
- Oversized lockable center bow storage locker
- Partner rod ramp w/rod handle organizer & hold-down strap
- 2 lift-out, molded aft storage boxes that will each accept seven 3700 tackle trays
- Molded utility rigging compartment w/lift-out tool/rope storage tray
- Molded utility rigging compartment for easy access to batteries & pumps & easy cleanup
- 16-oz. (.45 kg) plush, marine-grade cut pile carpet on decks & floor
- Lockable compression latches
- Footrest w/non-skid mat under console(s) Insulated aluminum lids w/welded corners

LIVEWELL SYSTEMS

- · 2 insulated aft 19-gal. (71.92 L) Guardian™ livewells w/digital timers
- 750 GPH (2,839.06 LPH) livewell recirculation/pump-out system
- 500 GPH (1,892.71 LPH) aerator/fill pump
- Dual remote drain controls
- Rotomolded w/rounded corners



PERFORMANCE

- NITRO® Vortex Technology™ (NVT™) hull for a smoother, drier ride
- Rapid Planing System[™] (RPS[™]) for quicker holeshots & maximized speed
- 3" (7.62 cm) adjustable jack plate (Verado® only)
- 8" (20.32 cm) adjustable jack plate (Optimax® only)
- Rigging tube for organized wiring & abrasion resistance
- Stainless steel propeller

STANDARD FEATURES CONT'D



TRAILER

- Custom-fit, single-axle NITRO® trailer w/powder-coat finish & GALVASHIELD® Impact corrosion & chip protection for improved durability
- Surge disc brakes
- Inside the frame brake line system w/1-point bleed
- 15" (38 10 cm) chrome wheels w/radial tires.
- No Touch Vortex hub lubrication system w/6-yr. 100,000-mile limited warranty
- Spare tire carrier (spare tire avail, at additional cost) All-welded rectangular GALVASHIELD® frame
- Space-saving swing-away tongue to reduce storage length **OPTIONS**
 - **Z-PRO PACKAGE** (w/Package, other standard features or options may not be available
 - NEW 2 Lowrance® Elite-9 Ti flush mounted fishfinders (bow
 - & console) Minn Kota[®] Fortrex[®] 24V, 80-lb. (36.29 kg) thrust, 45"
 - (1.14 m) shaft, foot-control trolling motor w/Universal Sonar 2 NEW cable trolling motor handle
 - NEW T-H Marine livewell culling system
 - Factory-applied keel protector
 3-bank, 30-amp battery charger

 - Bow port rod organizer
 - Snap-in sandwich tray for step-up to bow deck cooler - Hot Foot™throttle & Pro-Trim lever
 - Remote oil fill (standard)
 - 31M-AGM cranking battery upgrade - Retractable transom trailer tie downs
 - Tandem-axle trailer w/steel fender, surge brakes on 1 axle
 - Custom 14" (35.56 cm) aluminum wheel upgrade for tandem-axle trailer w/spare tire

BOW GRAPH

- Lowrance® HOOK-5 (flush mounted)
- Lowrance® Elite-7 Ti (flush or RAM mounted) - Lowrance® HDS-7 Carbon w/StructureScan® (flush or RAM mounted)
- Lowrance® HDS-9 Carbon w/StructureScan® (flush or RAM mounted)
- Lowrance® HDS-12 Carbon w/StructureScan® (flush or RAM mounted)
- Humminbird® HELIX™ 7 DI G2 (flush mounted)
- Humminbird® HELIX™ 7 SI G2 (RAM mounted) Humminbird® HELIX™ 9 SI G2 w/GPS (RAM mounted)
- Humminbird® HELIX™ 10 SI G2 w/GPS (RAM mounted)
- Humminbird® HELIX™ 12 SI G2 w/GPS (RAM mounted)

DASH GRAPH EXCHANGE

- Lowrance® Elite-7 Ti (flush or RAM mounted, or uninstalled) - Lowrance® HDS-7 Carbon w/StructureScan® (flush
- or RAM mounted, or uninstalled) - Lowrance® HDS-9 Carbon w/StructureScan® (flush
- or RAM mounted, or uninstalled) - Lowrance® HDS-12 Carbon w/StructureScan® (flush
- or RAM mounted, or uninstalled)
- Humminbird® HELIX™ 7 DI G2 (flush mounted)
- Humminbird® HELIX™ 7 SI G2 (gimbal or RAM mounted, or uninstalled)
- Humminbird® HELIX™ 9 SI G2 w/GPS (gimbal or RAM mounted, or uninstalled) - Humminbird® HELIX™ 10 SI G2 w/GPS (gimbal or RAM
- mounted, or uninstalled)
- Humminbird® HELIX™ 12 SI G2 w/GPS (gimbal or RAM) mounted, or uninstalled)

2ND DASH GRAPH

- Lowrance® Elite-7 Ti (RAM mounted)
- Lowrance® HDS-7 Carbon w/StructureScan® (RAM mounted
- Lowrance® HDS-9 Carbon w/StructureScan® (RAM mounted) Lowrance® HDS-12 Carbon w/StructureScan®
- (RAM mounted) - Humminbird® HELIX™ 7 SI G2 (RAM mounted)
- Humminbird® HELIX™ 9 SI G2 w/GPS (RAM or flush mounted) Humminbird® HELIX™ 10 SI G2 w/GPS (RAM or flush mounted)
- Humminbird® HELIX™ 12 SI G2 w/GPS (RAM or flush mounted)

- Bluetooth®-capable Sony® stereo system

ELECTRONICS

- **PERFORMANCE & STEERING** Hot Foot™ (non-Verado® motors only)
- Hot Foot[™] (Verado[®] motors only)

- 1,200-lb. (544.31 kg) swing-up locking jack w/swivel wheel Heavy-duty winch w/nylon strap & bow safety strap
- Outboard motor support to reduce hull & transom stress while towing
- Carpeted bunks & fender boards to protect hull
- Submersible LED lights
- Safety cables



TROLLING MOTOR

Minn Kota® Maxxum® 24V, 70-lb. (31.75 kg) thrust, 42" (1.07 m) shaft foot-control trolling motor

Dual trim lever on wheel (Verado® motors only)

Trim lever on wheel (not available w/Verado® motors)

- **BATTERY CHARGER EXCHANGE**
- 2-bank, 20-amp battery charger
- 3-bank, 30-amp battery charger
- 4-bank, 40-amp battery charger Dual Pro® international battery charger
- Emergency start system.
- Stealth 1, 20-amp battery charger w/out gauge - Stealth 1, 20-amp battery charger w/gauge

HARDWARE & EQUIPMENT

- 2 oxygen generators
- Automatic bilge pump
- Bow tool/drink holder CoolGuard™ livewell cooling system (factory installed only)
- HydroWave® electronic fish attractor Keel protector (Black or White)
- Loc-R-Bar® w/alarm - Port under deck storage drawer
- Snap-in sandwich tray - X-Grip® phone holder

CUSHIONS & SEATING

- Hydraulic pedestal (exchange)

- 2 bike seats (exchange) - 2 jump seats (exchange)
- **FUNCTIONAL**
- Custom color option
- Elite 4-color option
- Anti-fatigue mat Carpet embroidery
- Magnetic under-lid lure holder/organizer

installed)

TROLLING MOTOR

- Rod organizer SmartCraft® gauges
- Ventilation fan in bow storage box Remote oil fill (not available w/150 OptiMax® or 150
- OptiMax Pro XS) Removable port console & hardware (factory installed)
- 8" (20.32 cm) Atlas hydraulic jack plate (not available w/Verado® motors) - 8" (20.32 cm) BMS hydraulic jack plate (not available
- w/Verado® motors) Minn Kota® 8' (2.44 m) Talon shallow-water anchor (dealer
- installed) - 2 Minn Kota® 8' (2.44 m) Talon shallow-water anchors (dealer installed)
- Minn Kota® 12' (3.66 m) Talon shallow-water anchor (dealer installed) - 2 Minn Kota® 12' (3.66 m) Talon shallow-water anchors
- (dealer installed) Power-Pole® Blade 8' (2.44 m) shallow-water anchor (dealer
- 2 Power-Pole® Blade 8' (2.44 m) shallow-water anchors (dealer installed) Power-Pole® Blade 10' (3.05 m) shallow-water anchor
- (dealer installed) - 2 Power-Pole® Blade 10' (3.05 m) shallow-water anchors (dealer installed)
- Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 Minn Kota® Fortrex® 24V, 80-lb. (36,29 kg) thrust, 52"
- (1.32 m) shaft trolling motor w/Universal Sonar 2 Minn Kota® Fortrex® 36V, 112-lb. (50.80 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2

(1.32 m) shaft trolling motor w/Universal Sonar 2

Minn Kota® Fortrex® 36V, 112-lb. (50.80 kg) thrust, 52"

- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 45"
- (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot Link
- Minn Kota® Ultrex® 36V, 112-lb, (50.80 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot
- Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot
- Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot Link Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 52"
- (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot Link MotorGuide® X5 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor
- MotorGuide® X5 36V, 105-lb. (47.63 kg) thrust, 45" (1.14 m) shaft trolling motor MotorGuide® X5 36V, 105-lb. (47.63 kg) thrust, 50" (1.27 m) shaft trolling motor

COVERS

- Rope ratchet cover for side or dual consoles—Charcoal
- Pro Series 2-tone rope ratchet cover for side or dual consoles-Black & White Minn Kota® Fortrex® trolling motor rope ratchet cover for
- side or dual consoles—Charcoal Minn Kota® Fortrex® trolling motor Pro Series 2-tone rope

ratchet cover for side or dual consoles-Black & White

- **TRAILER** - 18" (45.72 cm) custom silver machined aluminum wheel upgrade & Hercules RAPTIS R-T5 spare tire (must order
- fiberglass fenders) 18" (45.72 cm) custom matte Black aluminum alloy wheel upgrade & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)

Fiberglass fenders for tandem-axle trailer

Single-axle spare tire Tandem-axle 1 brake w/14" (35.56 cm) tire/wheel upgrade & spare tire

Tandem-axle 2 brakes w/14" (35.56 cm) tire/wheel upgrade

& snare tire See dealer for more details

Retractable trailer tie downs



Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations and features,

| HULL LENGTH 18 8" (5.69 m) | BEAM 94 " (2.39 m) |
|-----------------------------------|---------------------------|
| MAX. PERSON CAPACITY | FUEL CAPACITY |

4/550 lbs. (249.48 kg) **40 gal.** (151.42 l)

8' 6" (2.59 m)

1.350 lbs. (612,35 kg)

TRANSOM HEIGHT

22.5" (57.15 cm)

MAX. WEIGHT CAPACITY

STORAGE LENGTH 21' 3"(6.48 m)

MAX. HP

175

SPECIFICATIONS

| Bottom width | 75" (1.91 m) |
|------------------------|--------------------------|
| Depth inside | 18.5" (46.99 cm) |
| Deadrise | 16 degrees |
| Draft | 15" (38.10 cm) |
| Average weight | 1,700 lbs. (771.11 kg) |
| Average package weight | 3,200 lbs. (1,451.50 kg) |

MOTOR OPTIONS

| MERCURY® MOTOR | EST. SPEED (MPH) | |
|---|------------------|--|
| 150 L FourStroke | 60–63 | |
| 150 L OptiMax® Pro XS | 60–63 | |
| 175 L OptiMax® Pro XS | 65–67 | |
| Estimated speeds are variable, depending on load, passengers, elevation, weather and water conditions | | |

Boat may be shown with optional equipment. Specs and features subject to change without notice.



STANDARD FEATURES



Package width

COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA® certified
- Flotation meets or exceeds NMMA® & U.S. Coast Guard Requirements
- EPA-compliant fuel system
- Non-skid mats bow & stern
- 6 drink holders
- 4 stainless steel pull-up cleats
- Integrated fold-down stainless steel reboarding ladder, angled for allowing optional shallow-water anchor
- 4 grab handles (1 at each seat)
- Fire extinguisher
- Paddle



CONSOLE

- Flush-mounted Lowrance® HOOK-5x fishfinder w/surface temperature & down imaging
- Hydraulic steering w/tilt
- Removable acrylic, tinted windscreen
- Ready to accept optional removable port console
- Custom-molded modular console w/2-tone gelcoat
- Veethree® multi-function instrumentation w/speedometer/fuel gauge, tach/trim gauge,
- voltmeter gauge & water pressure gauge
- Dash light dimmer
- Water-resistant switch panels
- LED courtesy light
- 12V outlet

CONSTRUCTION & EXTERIOR

- NEW 100% composite deck core w/superior thermal stability & strength-to-weight ratio Deck & hull chemically bonded & mechanically fastened w/stainless steel fasteners every
- 2" (5.08 cm) Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Low-profile gunnels to maximize deck size & for easier casting



ELECTRICAL

- Bow panel w/trolling motor receptacle, anchor/light switch, trim switch & capability to flush mount 12" (30.48 cm) graph
- 1,000 GPH (3,785.41 LPH) bilge pump - LED console courtesy light
- Bow navigation lights integrated into gunnels w/stowable stern light - Automotive-style labeled fuse panel w/cover
- Interstate® 24M-RD cranking battery
- 2 heavy-duty Interstate® Series 29 trolling batteries
- 2-bank, 8-amp battery charger w/exterior receptacle

- 6-gauge trolling motor wiring w/50-amp circuit breaker
- Master Power Switch
- Waterproof Deutsch plugin gauge connectors
- Water/abrasion-resistant connectors



INTERIOR

- NEW Z-Core™ seating system w/Force Flex suspension & contoured, rotomolded frame (driver & passenger seats)
- 34-sq.-ft. (3.2-sq.-m) bow deck for casting mobility w/lots of storage
- Step-up to bow deck w/62-qt. (58.67 L) insulated cooler & removable trash receptacle
- Bike seat w/pedestal
- Folding fishing seat w/composite frame
- Trolling motor pedal recess for Minn Kota® & MotorGuide® trolling motors
- Oversized, lockable port & starboard bow rod lockers w/lift assists for rods up to 8' (2.44 m)
- Molded-in drainage channels around bow storage compartments
- Port & starboard bow rod hold-down straps
- Oversized lockable center bow storage locker
- Partner rod ramp w/rod handle organizer & hold-down strap
- 2 lift-out, molded aft storage boxes that will each accept seven 3700 tackle trays
- Molded utility rigging compartment for easy access to batteries & pumps & easy cleanup
- 16-oz. (.45 kg) plush, marine-grade cut pile carpet on decks & floor
- Lockable compression latches
- Footrest w/non-skid mat under console(s)
- Insulated aluminum lids w/welded corners

LIVEWELL SYSTEMS

- Aft 30-gal. (113.56 L) Guardian™ aerated, divided livewell w/timer
- 500 GPH (1,892.71 LPH) livewell recirculation/pump-out system
- 500 GPH (1,892.71 LPH) aerator/fill pump
- Rotomolded w/rounded corners

PERFORMANCE

- NITRO® Vortex Technology™ (NVT™) hull for a smoother, drier ride
- Rapid Planing System™ (RPS™) for quicker holeshots & maximized speed
- Rigging tube for organized wiring & abrasion resistance
- Stainless steel propeller

TRAILER

- Custom-fit, single-axle NITRO® trailer w/powder-coat finish & GALVASHIELD® Impact corrosion & chip protection for improved durability
- 14" (35.56 cm) chrome wheels w/radial tires
- No Touch Vortex hub lubrication system w/6-yr. 100,000-mile limited warranty
- Spare tire carrier (spare tire avail, at additional cost)
- All-welded rectangular GALVASHIELD® frame
- Space-saving swing-away tongue to reduce storage length
- 1,200-lb. (544.31 kg) swing-up locking jack w/swivel wheel

STANDARD FEATURES CONT'D

- Heavy-duty winch w/nylon strap & bow safety strap
- Outboard motor support to reduce hull & transom stress while towing
- Carpeted bunks & fender boards to protect hull
- Submersible LED lights
- Safety cables



TROLLING MOTOR

Minn Kota® Maxxum® 24V, 70-lb. (31.75 kg) thrust, 42" (1.07 m) shaft foot-control trolling

OPTIONS

- **BOW GRAPH** Lowrance® HOOK-5 (flush mounted)
- Lowrance® Elite-7 Ti (flush mounted)
- Lowrance® Elite-7 Ti (RAM mounted)
- Lowrance® HDS-7 Carbon w/StructureScan® (flush or RAM mounted)
- Lowrance® HDS-9 Carbon w/StructureScan® (flush or RAM mounted)
- Lowrance® HDS-12 Carbon w/StructureScan® (flush or RAM mounted)
- Humminbird® HELIX™ 7 DI G2 (flush mounted)
- Humminbird® HELIX™ 7 SI G2 (RAM mounted)
- Humminbird® HELIX™ 9 SI G2 w/GPS (RAM mounted) Humminbird® HELIX™ 10 SI G2 w/GPS (RAM mounted)
- Humminbird® HELIX™ 12 SI G2 w/GPS (RAM mounted)

DASH GRAPH EXCHANGE

- Lowrance® Flite-7 Ti (flush mounted)
- Lowrance® Elite-7 Ti (RAM mounted)
- Lowrance® Elite-7 Ti (uninstalled)
- Lowrance® HDS-7 Carbon w/StructureScan® (flush) or RAM mounted, or uninstalled)
- Lowrance® HDS-9 Carbon w/StructureScan® (flush or RAM mounted, or uninstalled)
- Lowrance® HDS-12 Carbon w/StructureScan® (flush) or RAM mounted, or uninstalled)
- Humminbird® HELIX™ 7 DI G2 (flush mounted) Humminbird® HELIX™ 7 SI G2 (gimbal, flush or RAM mounted, or uninstalled)
- Humminbird® HELIX™ 9 SI G2 w/GPS (gimbal, flush or RAM mounted, or uninstalled) - Humminbird® HELIX™ 10 SI G2 w/GPS (gimbal, flush or RAM
- mounted, or uninstalled) - Humminbird® HELIX™ 12 SI G2 w/GPS (gimbal, flush or RAM

mounted, or uninstalled) PERFORMANCE & STEERING

- Hot Foot™ (non-Verado® motors only)
- Trim lever on wheel (not available w/Verado® motors)

BATTERY CHARGER EXCHANGE

- 2-bank, 20-amp battery charge
- 3-bank, 30-amp battery charger
- Battery maintenance system
- Dual Pro® international battery charger
- Stealth 1, 20-amp battery charger w/out gauge - Stealth 1, 20-amp battery charger w/gauge

HARDWARE & EQUIPMENT

- 2 oxygen generators
- Automatic bilge pump
- Bow tool/drink holder HydroWave® electronic fish attractor
- Keel protector (Black or White)
- Livewell control valve
- Loc-R-Bar® w/alarm (dealer installation not included)
- Port under deck storage drawer
- Snap-in sandwich trav

CUSHIONS & SEATING

- 2 bike seats (exchange)
- 2 jump seats (exchange) - Center seat
- Hydraulic pedestal (exchange)
- **FUNCTIONAL** Custom color option
- Carpet embroidery

OptiMax Pro XS)

- Magnetic under-lid lure holder/organizer - Rod organizer
- SmartCraft® gauges Remote oil fill (not available w/150 OptiMax® or 150
- Removable port console & hardware (factory installed)
- 8" (20.32 cm) adjustable jack plate (not available w/Verado® motors)

- 8" (20.32 cm) Atlas hydraulic jack plate (not available w/Verado® motors)
- 8" (20.32 cm) BMS hydraulic jack plate (not available
- w/Verado® motors) - Minn Kota® 8' (2.44 m) Talon shallow-water anchor (dealer
- installed) - 2 Minn Kota® 8' (2.44 m) Talon shallow-water anchors
- (dealer installed) - Minn Kota® 12' (3.66 m) Talon shallow-water anchor (dealer
- installed) - 2 Minn Kota® 12' (3.66 m) Talon shallow-water anchors (dealer installed)
- Power-Pole® Blade 8' (2.44 m) shallow-water anchor (dealer installed)
- 2 Power-Pole® Blade 8' (2.44 m) shallow-water anchors (dealer installed) - Power-Pole® Blade 10' (3.05 m) shallow-water anchor
- (dealer installed) - 2 Power-Pole® Blade 10' (3.05 m) shallow-water anchors (dealer installed)

TROLLING MOTOR

- Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg) thrust, 45"
- (1.14 m) shaft trolling motor w/Universal Sonar 2 Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg) thrust, 52"
- (1.32 m) shaft trolling motor w/Universal Sonar 2 Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot
- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot Link

shaft trolling motor COVERS

- Rope ratchet cover for side or dual consoles—Charcoal Minn Kota® Fortrex® trolling motor rope ratchet cover for

MotorGuide® X5 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m)

side or dual consoles—Charcoal

- **TRAILER** - 14" (35.56 cm) single-axle custom wheels w/spare tire
- 14" (35.56 cm) tandem-axle custom wheels w/spare tire - 18" (45.72 cm) custom silver machined aluminum wheel
- upgrade & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders) 18" (45.72 cm) custom matte Black aluminum alloy wheel upgrade & Hercules RAPTIS R-T5 spare tire (must order
- fiberglass fenders)
- Fiberglass fenders for tandem-axle trailer - Retractable trailer tie downs
- Single-axle brake upgrade
- Single-axle spare tire
- Tandem-axle 1 brake Tandem-axle 1 brake w/14" (35.56 cm) tire/wheel upgrade & spare tire
- Tandem-axle 2 brake Tandem-axle 2 brakes w/14" (35.56 cm) tire/wheel upgrade

& spare tire

See dealer for more details



Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations and features,

| HULL LEI | NGTH |
|------------------------|----------|
| 17 ′ 4 ″ | (5.28 m) |
| | |

| BEAM | | |
|------|----------|--|
| 9N" | (2 29 m) | |

FUEL CAPACITY

24 gal. (90.85 t)

MAX. HP 115

20.5" (52.07 cm)

MAX. WEIGHT CAPACITY 1,100 lbs. (498.95 kg)

TRANSOM HEIGHT

STORAGE LENGTH **20**′ **9**″(6.32 m)

SPECIFICATIONS

MAX. PERSON CAPACITY

3/460 lbs. (208.65 kg)

| Bottom width | 72" (1.83 m) |
|------------------------|--------------------------|
| Depth inside | 16.25" (41.28 cm) |
| Deadrise | 16 degrees |
| Draft | 15" (38.1 cm) |
| Average weight | 1,450 lbs. (657.71 kg) |
| Average package weight | 2.950 lbs. (1.338.10 kg) |

MOTOR OPTIONS

| MERCURY® MOTOR | EST. SPEED (MPH) | |
|---|------------------|--|
| 90 ELPT FourStroke | 40-42 | |
| 115 ELPT Pro XS FourStroke | 48–50 | |
| 115 ELPT Pro XS FourStroke CT | 50-52 | |
| Estimated speeds are variable, depending on load, passengers, | | |

Boat may be shown with optional equipment. Specs and features subject to change without notice.



STANDARD FEATURES



Package width

COMFORT, CONVENIENCE & PEACE OF MIND

- NNMMA® certified
- Flotation meets or exceeds NMMA® & U.S. Coast Guard Requirements
- EPA-compliant fuel system Non-skid mats bow & stern
- 2 drink holders
- 4 stainless steel, angled cleats flushed w/qunnels
- Integrated fold-down stainless steel reboarding ladder, angled for allowing optional shallow-water anchor

7' 11.5" (2.43 m)

- 2 grab handles (1 at passenger, 1 at transom)
- Fire extinguisher
- Paddle



CONSOLE

- Flush-mounted Lowrance® HOOK-4x fishfinder
- Single cable, no feedback rotary steering w/tilt
- Removable acrylic, tinted windscreen
- Ready to accept optional removable port console
- Custom-molded modular console w/2-tone gelcoat
- Veethree® multi-function instrumentation w/speedometer/fuel gauge, tach/trim gauge voltmeter gauge & water pressure gauge
- Dash light dimmer
- Water-resistant switch panels
- LED courtesy light
- 12V outlet
- Room to flush-mount optional, exchanged 9" (22.86 cm) graph



CONSTRUCTION & EXTERIOR

- NEW 100% composite deck core w/superior thermal stability & strength-to-weight ratio Deck & hull chemically bonded & mechanically fastened w/stainless steel fasteners every 2" (5.08 cm)
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Low-profile gunnels to maximize deck size & for easier casting

ELECTRICAL

- Bow panel w/trolling motor receptacle, anchor/light switch, trim switch & capability to flush mount 9" (22.86 cm) graph
 1,000 GPH (3,785.41 LPH) bilge pump
- LED console courtesy light
- Bow navigation lights integrated into gunnels w/stowable stern light
- Automotive-style labeled fuse panel w/cover
- Interstate® 24M-RD cranking battery
- Heavy-duty Interstate® Series 27 trolling battery

- 2-bank, 8-amp battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker
- Master Power Switch
- Waterproof Deutsch plugin gauge connectors Water/abrasion-resistant connectors

INTERIOR

- Driver & passenger bucket seats w/molded-in storage below
- 32-sq.-ft. (3.0-sq.-m) bow deck for casting mobility w/lots of storage
- Step-up to bow deck w/42-qt. (39.75 L) insulated cooler
- Step-up to aft deck w/polymer lid
- Bike seat w/pedestal
- Folding fishing seat w/composite frame
- Trolling motor pedal recess for Minn Kota® & MotorGuide® trolling motors
- Oversized, lockable port & starboard bow rod lockers for rods up to 7' (2.13 m)
- Molded-in drainage channels around bow storage compartments
- Port & starboard bow rod hold-down straps
- Oversized lockable center bow storage locker w/lift assist & organizer for 4 rods up to 7' 6"
- Partner rod ramp w/rod handle organizer & hold-down strap
- 2 lift-out, molded aft storage boxes that will each accept seven 3700 tackle trays
- Molded utility rigging compartment for easy access to batteries & pumps & easy cleanup
- 16-oz. (.45 kg) plush, marine-grade cut pile carpet on decks & floor
- Lockable compression latches
- Footrest w/non-skid mat under console(s)
- Insulated aluminum lids w/welded corners

LIVEWELL SYSTEMS

- Aft 23-gal. (87.06 L) Guardian™ aerated, divided livewell w/timer
- 500 GPH (1,892.71 LPH) livewell recirculation/pump-out system
- 500 GPH (1,892.71 LPH) aerator/fill pump
- Rotomolded w/rounded corners

PERFORMANCE


NITRO® Vortex Technology™ (NVT™) hull for a smoother, drier ride Rapid Planing System™ (RPS™) for quicker holeshots & maximized speed

- Rigging tube for organized wiring & abrasion resistance
- Stainless steel propeller

TRAILER

- Custom-fit, single-axle NITRO® trailer w/powder-coat finish & GALVASHIELD® Impact corrosion & chip protection for improved durability
- Silver Metallic powder-coat wheels w/13" (33.02 cm) radial tires
- No Touch Vortex hub lubrication system w/6-vr. 100,000-mile limited warranty
- Spare tire carrier (spare tire avail. at additional cost)
- All-welded rectangular GALVASHIELD® frame

STANDARD FEATURES CONT'D





- Heavy-duty winch w/nylon strap & bow safety strap
- Outboard motor support to reduce hull & transom stress while towing
- Carpeted bunks & fender boards to protect hull
- Submersible LED lights - Safety cables



TROLLING MOTOR

Minn Kota® Edge® 12V, 55-lb. (24.95 kg) thrust, 42" (1.07 m) shaft foot-control trolling

OPTIONS

BOW GRAPH

- Lowrance® HOOK-4x (flush mounted)
- Lowrance® HOOK-5 (flush mounted)
- Lowrance® Elite-7 Ti (flush or RAM mounted)
- Humminbird® HELIX™ 7 SI G2 (RAM mounted)

DASH GRAPH EXCHANGE

- Lowrance® HOOK-5x (flush mounted or uninstalled)
- Lowrance® Elite-7 Ti (flush or RAM mounted, uninstalled)
- Humminbird® HELIX™ 7 DI G2 (flush mounted)
- Humminbird® HELIX™ 7 SI G2 (gimbal or RAM mounted, or uninstalled)

PERFORMANCE & STEERING

Hydraulic steering

BATTERY CHARGER EXCHANGE

- 2-bank, 20-amp battery charger
- Dual Pro® international battery charger
- **HARDWARE & EQUIPMENT**
- 2 oxygen generators
- Automatic bilge pump
- Keel protector (Black or White) - Loc-R-Bar® w/alarm (dealer installation not included)

CUSHIONS & SEATING

- 2 bike seats (exchange)
- 2 jump seats (exchange)
- Center seat - Hydraulic pedestal (exchange)
- FUNCTIONAL - Custom color option
- Removable port console & hardware (factory installed) TROLLING MOTOR

- MotorGuide® X3 24V, 70-lb. (31.75 kg) thrust, 45" (1.14 m) shaft trolling motor

COVERS - Rope ratchet cover for side/dual consoles—Charcoal

TRAILER

- 13" (33.02 cm) single-axle custom wheels w/spare tire
- Retractable trailer tie downs
- Single-axle brake upgrade Single-axle spare tire
- See dealer for more details.



Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations and features.

| HULI | LEN | GTH |
|-------------|-----|----------|
| 19 ′ | 5" | (5.92 m) |

BEAM 93" (2.36 m)

TRANSOM HEIGHT **22**" (55.88 cm)

MAX. HP 200

MAX. PERSON CAPACITY 5/750 lbs. (340,19 kg)

FUEL CAPACITY 26 gal. (98.42 L)

MAX. WEIGHT CAPACITY 1.700 lbs. (771.11 kg)

STORAGE LENGTH

21′ (6.40 m)

SPECIFICATIONS

| Bottom width | 75" (1.91 m) |
|------------------------|--------------------------|
| Depth inside | 24" (60.96 cm) |
| Deadrise | 16 degrees |
| Draft | 15" (38.10 cm) |
| Average weight | 1,675 lbs. (759.77 kg) |
| Average package weight | 3,236 lbs. (1,467.83 kg) |
| Package width | 8' 3" (2.51 m) |

MOTOR OPTIONS

| MERCURY® MOTOR | EST. SPEED (MPH) | |
|--|------------------|--|
| 115 ELPT FourStroke CT | 42–45 | |
| 150 L FourStroke | 52–55 | |
| 150 L OptiMax® Pro XS | 52–55 | |
| 175 L OptiMax® Pro XS | 58–60 | |
| 200 L OptiMax® Pro XS | 64–65 | |
| Estimated speeds are variable, depending on load, passengers, elevation, weather and water conditions. | | |

- Port & starboard bow bolsters

- Lockable compression latches

LIVEWELL SYSTEMS

Stainless steel propeller

Submersible LED lighting

TROLLING MOTOR

Safety cables

& timer

PERFORMANCE

TRAILER

- Forward in-floor rod locker w/organizer

Midship in-floor wakeboard/ski storage - 2 aft storage compartments w/drop-in boxes

- Full-width, lockable rod/ski storage in aft deck

- 44-gt. (41.64 L) insulated cooler below aft seat

Insulated aluminum lids w/welded corners

- 500 GPH (1,892.71 LPH) aerator/fill pump

16-oz. (.45 kg) marine-grade cut-pile carpet w/edging

- 750 GPH (2,839.06 LPH) recirculator/pump-out pump

corrosion & chip protection for improved durability

Space-saving swing-away tongue to reduce storage length

Outboard motor support to reduce hull & transom stress while towing

Heavy-duty winch w/nylon strap & bow safety strap

14" (35.56 cm) chrome wheels w/radial tires

All-welded rectangular GALVASHIELD® frame

Carpeted bunks & fender boards to protect hull

Nylon tie-down straps (supplied w/boat package)

Spare tire carrier (spare tire optional)

motor w/Universal Sonar transducer

16-gal. (60.57 L) aerated, recirculated aft rotomolded livewell w/rounded corners, pump-out

Custom-fit, single-axle NITRO® trailer w/powder-coat finish & GALVASHIELD® Impact

Minn Kota® PowerDrive™ 12V, 55-lb. (24.95 kg) thrust, 54" (1.37 m) shaft foot-control trolling

No Touch Vortex hub lubrication system w/6-yr. 100,000-mile limited warranty

Boat may be shown with optional equipment. Specs and features subject to change without notice.

STANDARD FEATURES



COMFORT, CONVENIENCE & PEACE OF MIND

- NNMMA® certified
- Flotation meets or exceeds NMMA® & U.S. Coast Guard Requirements
- EPA-compliant fuel system
- Removable tournament-style ski pylon
- Port & starboard swim platforms w/integrated boarding ladder
- 10 stainless steel drink holders
- 4 pull-up cleats
- Cockpit grab handles
- Fire extinguisher
- Paddle





- Flush-mounted Lowrance® HOOK-5x fishfinder w/surface temperature & down imaging
- Tilt hydraulic steering
- Radiused walk-thru, tempered-glass windshield
- Custom-molded consoles
- Port console w/storage tray & insulated cooler
- AM/FM Bluetooth®-capable stereo w/USB & MP3 ports Veethree® multi-function instrumentation gauges
- Water-resistant switch panels

CONSTRUCTION & EXTERIOR

- Deck & hull chemically bonded & mechanically fastened w/stainless steel fasteners
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom



📆 ELECTRICAL

- 1,000 GPH (3,785.41 LPH) bilge pump
- Port & starboard cockpit courtesy lighting
- Interstate® starting battery
- Interstate® Series 27 trolling battery
- Heavy-duty 6-gauge trolling motor harness
- Master Power Switch
- Waterproof Deutsch gauge plugin connectors
- Automotive-style labeled fuse panel w/cover
- Water/abrasion-resistant connectors - Main & trolling motor harness circuit breaker protection

INTERIOR

NEW Z-Core™ seating system w/Force Flex suspension & contoured, rotomolded frame (driver & passenger seats)

- Aft bench seating w/2 convertible, removable fishing seats
- 3 bow storage compartments

OPTIONS



BOW GRAPH

- Lowrance® HOOK-5x (flush mounted)
- Lowrance® Elite-7 Ti (flush mounted)
- Lowrance® HDS-7 Carbon w/StructureScan® (flush mounted) - Lowrance® HDS-9 Carbon w/StructureScan® (flush mounted)

DASH GRAPH EXCHANGE

- Lowrance® Elite-7 Ti (flush mounted)
- Lowrance® HDS-7 Carbon w/StructureScan® (flush mounted)
- Lowrance® HDS-9 Carbon w/StructureScan® (flush mounted)

BATTERY CHARGER EXCHANGE

- 2-bank. 8-amp battery charger
- 2-bank. 20-amp battery charger
- 3-bank. 30-amp battery charger
- Dual Pro[®] international battery charger system

HARDWARE & EQUIPMENT

- Bimini top—Charcoal
- Automatic bilge pump
- Keel protector (Black or White)

CUSHIONS & SEATING

- 2 bike seats
- 2 jump seats
- 1 bike & 1 jump seat
- Bow & aft sundeck cushions

FUNCTIONAL

- Custom color
- 6" (15.24 cm) top-adjusting jack plate
- Snap-in cockpit carpet

TROLLING MOTOR

- Minn Kota® PowerDrive™ 24V, 70-lb. (31.75 kg) thrust, 54" (1.37 m) shaft trolling motor
- MotorGuide® X3 24V, 70-lb. (31.75 kg) thrust, 45" (1.14 m) shaft trolling motor

COVERS

- Cover—Charcoal
- Cover to fit w/Bimini top-Charcoal

TRAILER

- Retractable trailer tie downs
- Single-axle brake upgrade
- 215/75R14C black sidewall SIL spare tire kit
- Custom single-axle trailer wheel w/spare tire (exchange)

See dealer for more details.



Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations and features,

| L LENGTH 7" (6.58 m) |
|--|
| X. PERSON CAPACITY 1,200 lbs. (544.31 kg) |

SPECIFICATIONS

BEAM 100" (2.54 m)

FUEL CAPACITY

8' 6" (2.59 m)

64 aal. (242.27 l)

MAX. WEIGHT CAPACITY 2.500 lbs. (1.133,98 kg)

MAX. HP 350

STORAGE LENGTH **24' 7**"(7.49 m)

MOTOR OPTIONS

TRANSOM HEIGHT

28" (71.12 cm)

| ottom width | 77" (1.96 m) | MERCURY® MOTOR |
|----------------------|--------------------------|--|
| pth inside | 25" (63.50 cm) | 250 XL OptiMax® Pro XS |
| drise | 18 degrees | 250 XL Verado® Pro FourStroke |
| t | 18" (45.72 cm) | 300 XL Verado® Pro FourStroke |
| erage weight | 2,900 lbs. (1,315.42 kg) | 350 XL Verado® |
| erage package weight | 5,500 lbs. (2,494.76 kg) | Estimated speeds are variable, depending |

Boat may be shown with ontional equipment Specs and features subject to change without notice.



STANDARD FEATURES



Package width

COMFORT, CONVENIENCE & PEACE OF MIND

- NNMMA® certified
- Flotation meets or exceeds NMMA® & U.S. Coast Guard Requirements
- EPA-compliant fuel system
- Gunnels designed to maximize interior space & fishing room - 3 stainless steel drink holders
- 4 stainless steel pull-up cleats
- Stainless steel bow & stern eyes
- Anti-fatigue matting below bow & cockpit carpet - Emergency boarding ladder
- Passenger grab handle
- Fire extinguisher



(A) CONSOLE

- RAM®-mounted Lowrance® Elite-7 Ti Combo fishfinder w/GPS
- Hydraulic steering w/custom tilt wheel
- Heavy-duty molded, tinted windscreens
- Custom-molded port & starboard modular consoles w/2-tone gelcoat scheme
- Oversized carpeted, lockable port glovebox
- Below-console footrest w/non-skid mat
- Port & starboard below-console shelves
- Helm below-console recess for optional Hot Foot™ pedal
- Veethree® multi-function instrumentation gauges w/speedometer/fuel gauge, tach/trim
- gauge, voltmeter gauge & water pressure gauge
- Digital keypads w/integrated master power switch
- Side-mounted LED courtesy light
- Space to mount additional electronics



CONSTRUCTION & EXTERIOR

- NEW 100% composite deck core w/superior thermal stability & strength-to-weight ratio
- Deck & hull chemically bonded & mechanically fastened
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Hand-laid, heavy-duty performance hull w/reinforced sides



- E-Start emergency jump start system
- Bow panel w/trolling motor receptacle, vent fan, bilge, navigation light, anchor light & trim
- Redundant automatic bilge pump system w/dual 1,600 GPH (6,056.66 LPH) pumps
- Stowable navigation lights
- Heavy-duty Interstate® 27M-XHD starting battery
- 3 heavy-duty Interstate® Series SRM-29 trolling batteries
- 4-bank, 35-amp onboard battery charger w/exterior receptacle

- Automotive style, labeled fuse panel w/cover
- Manual LED lighting in bow storage compartments
- Master Power Switch
- 6-gauge trolling motor wiring w/50-amp circuit breaker
- Ventilation fan system in bow storage
- Console-mounted 12V outlet
- Waterproof Deutsch gauge plugin connectors
- Water/abrasion-resistant connectors



INTERIOR

- NEW Z-Core[™] seating system w/Force Flex suspension & contoured, rotomolded frame (driver & passenger seats)
- Bike seat w/hydraulic pedestal
- Folding molded fishing seat w/hydraulic pedestal
- Bow & aft lockable storage compartments
- Port & starboard bow lockers w/lift assists
- 3-level center rod locker w/organizers for rods up to 8' (2.44 m)
- Passenger rod ramp w/rod handle organizer & hold-down strap
- Port & starboard midship insulated storage boxes designed to accept tackle trays
- Between-console foldout storage drawer w/two 3600 tackle boxes Starboard tool holder
- 2 lift-out, molded aft storage boxes that will each accept seven 3700 tackle trays
 Extra-large integrated port net holder
- Port bow cooler w/removable trav
- 24-oz. (.68 kg) plush, marine-grade, cut pile carpet on decks & floor
- Insulated aluminum lids w/welded corners
- Room to RAM-mount additional electronics at bow
- Stainless steel fore & aft rails (port & starboard)
- Stainless steel lockable compression latches

LIVEWELL SYSTEMS

- 5.5-gal. (20.82 L) insulated bow baitwell w/removable bucket
- Aft 26-gal. (98.42 L) insulated Guardian™ anti-slosh rotomolded livewell w/rounded corners, removable divider & bait bucket
- Two 500 GPH (1,892.71 LPH) aerator/fill pumps w/timers (1 for baitwell, 1 for livewell)
- Two 750 GPH (2,839.06 LPH) recirculator pumps w/timers (1 for baitwell, 1 for livewell)
- Pump-out systems (baitwell & livewell)
- Oxygen generators (baitwell & livewell)
- Livewell lid latching to keep lid closed at speed & in rough conditions
- Insulated aluminum lids w/welded corners



PERFORMANCE

- Deep V performance hull w/Rapid Planing System™ (RPS™) transom 3" (7.62 cm) adjustable jack plate (Verado® motors only)
- 10" (25.40 cm) adjustable jack plate (OptiMax® motor only)
- Lifting strakes to maximize overall handling & performance

STANDARD FEATURES CONT'D

- Transom designed for Kicker motor application
- Rigging tube
- Stainless steel propeller



OPTIONS

- Custom-fit, tandem-axle NITRO® trailer w/powder-coat finish & GALVASHIELD® Impact corrosion & chip protection for improved durability
- NEW integrated boarding step w/safety handle for easier boarding/reboarding at bow while boat is on trailer
- NEW 7-pin connector

or options may not be available)

fishfinder w/3D StructureScan®

fishfinder w/3D StructureScan®

- Lowrance® Point-1 GPS antenna

Kicker stereo system w/speakers

Factory-applied keel protector

- 2-bank, 20-amp battery charger

- 3-bank, 30-amp battery charger

- 1 extra SRM29 trolling battery

& Verado digital gauges

BOW GRAPH

- 31M-AGM cranking battery upgrade

- Lowrance® Elite-7 Ti (RAM mounted)

DASH GRAPH EXCHANGE

mounted or uninstalled)

mounted or uninstalled)

or uninstalled)

or uninstalled)

ELECTRONICS

Sony® stereo system

2ND DASH GRAPH

- Lowrance® Elite-7 Ti (bracket mounted)

- Walk-thru windshield

motor stabilizer & remote

Z-PRO PACKAGE (w/Package, other standard features

Console Lowrance® HDS-12 Carbon Touch RAM mounted

(1.27 m) shaft, foot-control trolling motor w/sonar, trolling

- Bow Lowrance® HDS-9 Carbon Touch RAM mounted

MotorGuide® Xi5 36V, 105-lb. (47.63 kg) thrust, 50"

Networking between fishfinders $\&\ trolling\ motor$

Mercury® 9.9 remote ProKicker w/built-in fuel tank

w/Verado® motor: Verado electric hydraulic tilt steering

- Lowrance® HDS-7 Carbon w/StructureScan® (RAM

Lowrance® HDS-9 Carbon w/StructureScan® (RAM

mounted; dash StructureScan® must be chosen also)

mounted; dash StructureScan® must be chosen also)

Humminbird® HELIX™ 9 SI G2 w/GPS (RAM mounted)

Humminbird® HELIX™ 10 SI G2 w/GPS (RAM mounted)

Humminbird® HELIX™ 12 SI G2 w/GPS (RAM mounted)

- Lowrance® HDS-7 Carbon w/StructureScan® (RAM

- Lowrance® HDS-9 Carbon w/StructureScan® (RAM

- Lowrance® HDS-12 Carbon w/StructureScan® (RAM

- Humminbird® HELIX™ 9 SI G2 w/GPS (RAM mounted

- Humminbird® HELIX™ 10 SI G2 w/GPS (RAM mounted) - Humminbird® HELIX™ 12 SI G2 w/GPS (RAM mounted

- Lowrance® HDS-7 Carbon w/StructureScan® (RAM

Lowrance® HDS-9 Carbon w/StructureScan® (RAM)

mounted; dash StructureScan® must be chosen also)

mounted: dash StructureScan® must be chosen also)

Lowrance® HDS-12 Carbon w/StructureScan® (RAM)

mounted; dash StructureScan® must be chosen also) - Humminbird® HELIX™ 7 SI G2 (RAM mounted)

Humminbird® HELIX™ 9 SI G2 (RAM mounted)

Humminbird® HELIX™ 10 SI G2 (RAM mounted)

- Humminbird® HELIX™ 12 SI G2 (RAM mounted)

Humminbird® HELIX™ 7 SI G2 (RAM mounted or uninstalled)

Lowrance® HDS-12 Carbon w/StructureScan® (RAM

Humminbird® HELIX™ 7 SI G2 (RAM mounted)

mounted; dash StructureScan® must be chosen also)

- All-welded rectangular GALVASHIELD® frame
- Surge disc brakes on 2 axles Inside the frame brake line system w/1-point bleed - 14" (35.56 cm) custom NITRO® aluminum wheels w/radial tires - No Touch Vortex hub lubrication system w/6-yr. 100,000-mile limited warranty - Spare tire carrier w/matching spare tire

PERFORMANCE & STEERING

- Bravo One® propeller

BATTERY CHARGER EXCHANGE

- GEN 2-bank, 10-amp + 3-bank, 10-amp charger

HARDWARE & EQUIPMENT

- Bimini top
- Walk-thru windshield
- Aft deck rail
- Thumbscrew rail mount rod holders (set of 2)

- Canvas enclosure (must have windshield option)
- Keel protector (Black or White)

CUSHIONS & SEATING

- Smooth Moves seat suspension

FUNCTIONAL

- Single console (removes standard port console)
- 6" (15.24 cm) BMS hydraulic jack plate (available

TROLLING MOTOR

- Minn Kota[®] Terrova[™] 36V, 112-lb. (50.80 kg) thrust, 60"
- Minn Kota® Terrova™ 36V, 112-lb. (50.80 kg) thrust, 60" (152.40 cm) shaft trolling motor w/i-Link (does not include
- shaft trolling motor w/i-Pilot & Universal Sonar 2
- shaft trolling motor w/i-Link & Universal Sonar 2 Minn Kota® Ulterra™ 36V, 112-lb. (50.80 kg) thrust, 60"
- (152.40 cm) shaft trolling motor w/i-Link & Universal Sonar 2 MotorGuide® TR109 Digital Tour Series 36V, 109-lb. (49.44 kg) thrust, 60" (152.4 cm) shaft trolling motor
- MotorGuide® Xi5 36V, 105-lb. (47.63 kg) thrust, 60"

KICKER MOTOR

- ELHPT FourStroke Command Thrust ProKicker or Mercury® 15 ELHPT FourStroke Command Thrust ProKicker (motor & battery sold separately)
- for Mercury® 9.9 or 15 ELHPT ProKicker & rigging bracket
- for starboard mounting (motor & battery sold separately)
- & rigging bracket for starboard mounting w/OptiMax® rigging (motor & battery sold separately) Factory-installed fuel tank attachment for Mercury® 9.9
- Factory-rigged Mercury® 9.9 ELHPT FourStroke Command Thrust ProKicker outboard w/4.5-gal. (17.03 L) EPAcompliant fuel tank & rigging bracket (battery sold

- Space-saving swing-away tongue to reduce storage length
- 1,600-lb. (725.75 kg) swing-up locking jack w/swivel wheel
- Heavy-duty winch w/non-binding nylon strap & bow safety strap
- Outboard motor support to reduce hull & transom stress while towing
- Fiberglass fender design w/integrated back-up lights
- Carpeted bunks & fender boards to protect hull
- Submersible LED lights
- Safety cables - Steps



TROLLING MOTOR

- Minn Kota® Terrova® 36V, 112-lb. (50.80 kg) thrust, 60" (1.52 m) composite shaft, foot-
- control trolling motor w/Bluetooth® & Universal Sonar 2 NEW quick-release bracket for Minn Kota® or MotorGuide® trolling motor
- Pedal recess that will accommodate Minn Kota® or MotorGuide® trolling motor pedal

Lenco trim tabs

- Tournament ruler
- Thumbscrew rail mount rod holders (set of 4)
- Thumbscrew rail mount rod holders (set of 6)
- Canvas enclosure w/curtain (must have windshield option)

- Fishing chair & pedestal

- Remote oil fill (available w/OptiMax® motors only)
- SmartCraft® gauges (standard w/Verado® motors)

w/Verado® motors only)

- (152.40 cm) shaft trolling motor w/i-Pilot
- connections for Humminbird® graphs)
 Minn Kota® Ultrex™ 112-lb. (50.80 kg) thrust, 62" (157.48 cm)
- Minn Kota[®] Ultrex[™] 112-lb. (50.80 kg) thrust, 62" (157.48 cm)

(152.40 cm) shaft trolling motor

- Rigging kit for starboard mounting of the Mercury® 9.9
- Factory-installed 4.5-gal. (17.03 L) EPA-compliant fuel tank
- Factory-installed fuel tank attachment for Mercury® 9.9 or 15 ELPT FourStroke Command Thrust ProKicker, remote
- or 15 ELPT FourStroke Command Thrust ProKicker, remote & rigging bracket for starboard mounting w/Verado® rigging (motor & battery sold separately)
- separately)

- Factory-rigged Mercury® 15 ELHPT FourStroke Command Thrust ProKicker outboard w/4.5-gal. (17.03 L) EPAcompliant fuel tank & rigging bracket (battery sold separately)
- Factory-installed Mercury® 9.9 ELPT FourStroke Command Thrust ProKicker w/fuel tank attachment, remote & rigging bracket w/OptiMax® rigging (battery sold separately) Factory-installed Mercury® 9.9 ELPT FourStroke Command
- Thrust ProKicker w/fuel tank attachment, remote & rigging bracket w/Verado® rigging (battery sold separately) Factory-installed Mercury® 15 ELPT FourStroke Command Thrust ProKicker w/fuel tank, remote & rigging bracket
- w/OptiMax® rigging (battery sold separately) Factory-installed Mercury® 15 ELPT Four Stroke Command Thrust ProKicker w/fuel tank, remote & rigging bracket

COVERS - Rope ratchet cover—Charcoal

TRAILER

- Rope ratchet cover—Black

- 18" (45.72 cm) custom wheels w/spare tire - 18" (45.72 cm) matte black aluminum alloy wheel

w/Verado® rigging (battery sold separately)

& Hercules RAPTIS R-T5 spare tire Retractable trailer tie downs

See dealer for more details







Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations and features

| HULL LENGTH 18' 11" (5.77 m) | |
|---|--|
| MAX. PERSON CAPACITY 4/1,050 lbs. (476.27 kg) | |

SPECIFICATIONS

Bottom width

Depth inside

Average weight

Package width

Average package weight

Deadrise

Draft

TRANSOM HEIGHT **BEAM 25**" (63.50 cm) **102**" (2.59 m)

FUEL CAPACITY

76" (1.93 m)

17 degrees

8' 6" (2.59 m)

25.5" (64.77 cm)

19.75" (50.17 cm)

2,300 lbs. (1,043.26 kg)

4,500 lbs. (2,041.17 kg)

45 gal. (170.34 L)

MAX. HP 200

STORAGE LENGTH **MAX. WEIGHT CAPACITY 22**′ **7**″(6.88 m)

2.000 lbs. (907.18 kg)

MOTOR OPTIONS

| MERCURY® MOTOR | EST. SPEED (MPH) |
|--------------------------------------|----------------------------|
| 150 XL FourStroke | 41–43 |
| 150 XL OptiMax® Pro XS | 42–45 |
| 200 XL OptiMax® | 50–52 |
| 200 XL Verado® (L4) | 49–51 |
| 200 XL Verado® (L6) | _ |
| Estimated speeds are variable, deper | nding on load, passengers. |

elevation, weather and water conditions.

Boat may be shown with ontional equipment Specs and features subject to change without notice.

STANDARD FEATURES



COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA® certified
- Flotation meets or exceeds NMMA® & U.S. Coast Guard Requirements
- EPA-compliant fuel system
- Gunnels designed to maximize interior space & fishing room - 3 stainless steel drink holders
- 4 stainless steel pull-up cleats
- Stainless steel bow & stern eyes
- Fold-down 4-step stainless steel reboarding ladder
- Passenger grab handle
- Fire extinguisher

(A) CONSOLE

- Gimbal-mounted Lowrance® HOOK-5x fishfinder w/surface temperature & down imaging
- Hvdraulic steering w/custom tilt wheel
- Heavy-duty molded, tinted windscreens
- Custom-molded port & starboard modular consoles w/2-tone gelcoat scheme
- Oversized carpeted, lockable port glovebox
- Below-console footrest w/non-skid mat
- Port & starboard below-console shelves Helm below-console recess for optional Hot Foot™ pedal
- Veethree® multi-function instrumentation gauges w/speedometer/fuel gauge, tach/trim gauge, voltmeter gauge & water pressure gauge
- Digital keypads w/integrated master power switch
- Side-mounted LED courtesy light
- Space to mount additional electronics



CONSTRUCTION & EXTERIOR

- NEW 100% composite deck core w/superior thermal stability & strength-to-weight ratio
- Deck & hull chemically bonded & mechanically fastened
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Hand-laid, heavy-duty performance hull w/reinforced sides



ELECTRICAL

- Bow panel w/trolling motor receptacle, navigation light, anchor light & trim switches
- 1.000 GPH (3,785.41 LPH) bilge pump
- Bow navigation lights integrated into gunnels w/stowable stern light Heavy-duty Interstate® 27M-XHD starting battery
- 2 heavy-duty Interstate® Series SRM-29 trolling batteries - 2-bank, 20-amp onboard battery charger w/exterior receptacle
- 2 automotive style, labeled fuse panels w/cover
- Manual LED lighting in bow storage compartments - Master Power Switch

- 6-gauge trolling motor wiring w/50-amp circuit breaker
- Console-mounted 12V outlet
- Waterproof Deutsch gauge plugin connectors
- Water/abrasion-resistant connectors



INTERIOR

- NEW Z-Core[™] seating system w/Force Flex suspension & contoured, rotomolded frame (driver & passenger seats)
- Bike seat w/pedestal
- Folding molded fishing seat w/pedestal
- Bow & aft lockable storage compartments
- Port & starboard bow lockers w/lift assists
- 3-level center rod locker w/organizers for rods up to 8' (2.44 m)
- Step-up to bow deck w/storage for two 3600 tackle boxes
- Starboard tool holder
- 2 lift-out, molded aft storage boxes that will each accept seven 3700 tackle trays
- Extra-large integrated port net holder
- Port bow cooler w/removable tray
- · 24-oz. (.68 kg) plush, marine-grade, cut pile carpet on decks & floor
- Insulated aluminum lids w/welded corners
- Room to RAM-mount additional electronics at bow
- Stainless steel fore & aft rails (port & starboard)
- Stainless steel lockable compression latches

LIVEWELL SYSTEMS

- 5.5-gal. (20.82 L) insulated bow baitwell w/removable bucket
- Aft 26-gal. (98.42 L) insulated Guardian™ anti-slosh rotomolded livewell w/rounded corners, removable divider & bait bucket
- Two 500 GPH (1,892.71 LPH) aerator/fill pumps w/timers (1 for baitwell, 1 for livewell)
- Two 750 GPH (2,839.06 LPH) recirculator pumps w/timers (1 for baitwell, 1 for livewell)
- Pump-out systems (baitwell & livewell)
- Livewell lid latching to keep lid closed at speed & in rough conditions
- Insulated aluminum lids w/welded corners

PERFORMANCE

- Deep V performance hull
- · Lifting strakes to maximize overall handling & performance
- Transom designed for Kicker motor application
- Rigging tube
- Stainless steel propeller

- Custom-fit, tandem-axle NITRO® trailer w/powder-coat finish & GALVASHIELD® Impact corrosion & chip protection for improved durability
- NEW integrated boarding step w/safety handle for easier boarding/reboarding at bow while hoat is on trailer
- Surge disc brakes on 1 axle

STANDARD FEATURES CONT'D

- Inside the frame brake line system w/1-point bleed
- 14" (35.56 cm) custom NITRO® aluminum wheels w/radial tires
- No Touch Vortex hub lubrication system w/6-yr. 100,000-mile limited warranty
- Spare tire carrier (spare tire avail, at additional cost)
- All-welded rectangular GALVASHIELD® frame
- Space-saving swing-away tongue to reduce storage length
- 1,200-lb. (544.31 kg) swing-up locking jack w/swivel wheel
- Heavy-duty winch w/non-binding nylon strap & bow safety strap
- Outboard motor support to reduce hull & transom stress while towing
- Steel fenders w/diamond-tread step plates

OPTIONS

- **BOW GRAPH**
- Lowrance® HOOK-5 Pro (bracket mounted)
- Lowrance® Elite-7 Ti (RAM mounted)
- Lowrance® HDS-7 Carbon w/StructureScan® (RAM mounted; dash StructureScan® must be chosen also)
- Lowrance® HDS-9 Carbon w/StructureScan® (RAM)
- mounted; dash StructureScan® must be chosen also) Lowrance® HDS-12 Carbon w/StructureScan® (RAM)
- mounted: dash StructureScan® must be chosen also) Humminbird® HELIX™ 7 SI G2 (RAM mounted)
- Humminbird® HELIX™ 9 SI G2 w/GPS (RAM mounted) Humminbird® HELIX™ 10 SI G2 w/GPS (RAM mounted) Humminbird® HELIX™ 12 SI G2 w/GPS (RAM mounted)

DASH GRAPH EXCHANGE

- Lowrance® Elite-7 Ti (RAM mounted or uninstalled)
- Lowrance® HDS-7 Carbon w/StructureScan® (RAM mounted or uninstalled)
- Lowrance® HDS-9 Carbon w/StructureScan® (RAM mounted or uninstalled)
- Lowrance® HDS-12 Carbon w/StructureScan® (RAM mounted or uninstalled) Humminbird® HELIX™ 7 SI G2 (RAM mounted
- or uninstalled) Humminbird® HELIX™ 9 SI G2 w/GPS (RAM mounted
- or uninstalled) - Humminbird® HELIX™ 10 SI G2 w/GPS (RAM mounted)
- Humminbird® HELIX™ 12 SI G2 w/GPS (RAM mounted) or uninstalled)

2ND DASH GRAPH

- Lowrance® HOOK-5 Pro (bracket mounted)
- Lowrance® Elite-7 Ti (bracket mounted) - Lowrance® HDS-7 Carbon w/StructureScan® (RAM
- mounted; dash StructureScan® must be chosen also) - Lowrance® HDS-9 Carbon w/StructureScan® (RAM mounted; dash StructureScan® must be chosen also)
- Lowrance® HDS-12 Carbon w/StructureScan® (RAM) mounted; dash StructureScan® must be chosen also)
- Humminbird® HELIX™ 7 SI G2 (RAM mounted)
- Humminbird® HELIX™ 9 SI G2 (RAM mounted)
- Humminbird® HELIX™ 10 SI G2 (RAM mounted) Humminbird® HELIX™ 12 SI G2 (RAM mounted)

ELECTRONICS

Sonv® stereo system

PERFORMANCE & STEERING

Lenco trim tabs

BATTERY CHARGER EXCHANGE

- GEN 3-bank, 30-amp battery charger
- GEN 4-bank, 40-amp battery charger

HARDWARE & EQUIPMENT

- Bimini ton
- Walk-thru windshield
- Tournament ruler - Anti-fatigue mat
- Emergency ladder
- Ski tow pylon - 2 oxygen generators
- Thumbscrew rail mount rod holders (set of 2)
- Thumbscrew rail mount rod holders (set of 4) - Thumbscrew rail mount rod holders (set of 6)
- Canvas enclosure (must have windshield option) - Canvas enclosure w/curtain (must have windshield option)
- Keel protector (Black or White)

CUSHIONS & SEATING

- Fishing chair & pedestal
- Smooth Moves seat suspension

- Carpeted bunks & fender boards to protect hull

- Submersible LED lights
- Safety cables



Remote oil fill (available w/OptiMax® motors only)

- SmartCraft® gauges (standard w/Verado® motors)

Minn Kota® Terrova™ 24V, 80-lb. (36.29 kg) thrust, 60"

(152.40 cm) shaft trolling motor w/Universal Sonar 2

Minn Kota® Terrova™ 24V, 80-lb. (36.29 kg) thrust, 60"

Minn Kota® Terrova™ 36V, 80-lb. (36.29 kg) thrust, 60"

(152.40 cm) shaft trolling motor w/i-Link Minn Kota® Terrova™ 36V, 112-lb. (50.80 kg) thrust, 60"

Minn Kota® Terrova™ 36V, 112-lb. (50.80 kg) thrust, 60"

(152.40 cm) shaft trolling motor w/Universal Sonar 2 Minn Kota® Terrova™ 36V, 112-lb. (50.80 kg) thrust, 60"

(157.48 cm) shaft trolling motor w/Universal Sonar 2

(157.48 cm) shaft trolling motor w/Universal Sonar 2

Minn Kota® Ulterra™ 36V, 112-lb. (50.80 kg) thrust, 60"

(152.40 cm) shaft trolling motor w/Universal Sonar 2

MotorGuide® Xi5 24V, 80-lb. (36.29 kg) thrust, 60"

(152.40 cm) shaft trolling motor MotorGuide® Xi5 36V, 105-lb. (47.63 kg) thrust, 60"

Rigging kit for starboard mounting of the Mercury®

9.9 ELHPT FourStroke Command Thrust ProKicker

ProKicker (motor & battery sold separately)

or Mercury® 15 ELHPT FourStroke Command Thrust

Factory-installed fuel tank attachment for Mercury® 9.9

& rigging bracket for starboard mounting w/OptiMax®

Factory-installed fuel tank attachment for Mercury® 9.9

& rigging bracket for starboard mounting w/Verado®

Factory-installed Mercury® 9.9 ELHPT FourStroke

Factory-installed Mercury® 9.9 ELPT FourStroke

Factory-installed Mercury® 9.9 ELPT FourStroke

Factory-installed Mercury® 15 ELHPT FourStroke

Thrust ProKicker w/fuel tank attachment, remote

Thrust ProKicker w/fuel tank attachment, remote

& rigging bracket w/Verado® rigging (battery sold

& rigging bracket w/OptiMax® rigging (battery sold

Command Thrust ProKicker w/rigging bracket (battery

Command Thrust ProKicker w/fuel tank attachment,

remote & rigging bracket w/Verado® rigging (battery sold

Factory-installed Mercury® 15 ELPT FourStroke Command

Factory-installed Mercury® 15 ELPT FourStroke Command

Command Thrust ProKicker w/fuel tank attachment,

remote & rigging bracket w/OptiMax® rigging (battery

Command Thrust ProKicker w/rigging bracket (battery

or 15 ELPT FourStroke Command Thrust ProKicker, remote

or 15 ELPT FourStroke Command Thrust ProKicker, remote

(152.40 cm) shaft trolling motor

KICKER MOTOR

rigging (motor

rigging (motor

sold separately)

sold senarately)

separately)

senarately)

sold separately)

& battery sold separately)

& battery sold separately)

Minn Kota® Ultrex™ 112-lb. (50.80 kg) thrust, 62"

(152.40 cm) shaft trolling motor w/i-Link (does not include

(152.40 cm) shaft trolling motor w/i-Pilot

(152.40 cm) shaft trolling motor w/i-Pilot

connections for Humminbird® graphs) Minn Kota® Ultrex™ 112-lb. (50.80 kg) thrust, 62"

& i-Pilnt

& i-Link

& i-l ink

- 6" (15.24 cm) BMS hydraulic jack plate (available

FUNCTIONAL

w/Verado® motors only)

TROLLING MOTOR

TROLLING MOTOR

- Minn Kota® PowerDrive™ 24V, 70-lb. (31.75 kg) thrust, 60" (1.52 m) composite shaft, footcontrol trolling motor w/Universal Sonar 2
- NEW guick-release bracket for Minn Kota® or MotorGuide® trolling motor
- · Pedal recess that will accommodate Minn Kota® or MotorGuide® trolling motor pedal

- Rope ratchet cover—Charcoal
- Rope ratchet cover—Black

TRAILER

- Spare tire kit Retractable trailer tie downs

COVERS

- Tandem 2 brake upgrade

See dealer for more details





ARE YOU READY FOR THE

THREE CONVENIENT WAYS TO SHOP



You'll find NITRO boats at hundreds of quality dealers around the world, including more than 75 Bass Pro Shops locations and hundreds of quality independent dealers across North America.




Visit NITRO.COM to browse our complete lineup, watch videos, compare features and pricing and locate the dealer nearest you. You can even customize, price and order your boat, all from the comfort of your home.



Call us at 855.630.2711 to speak to one of our knowledgeable representatives.

THE LARGEST, MOST IMMERSIVE FISH AND WILDLIFE ATTRACTION IN THE WORLD.

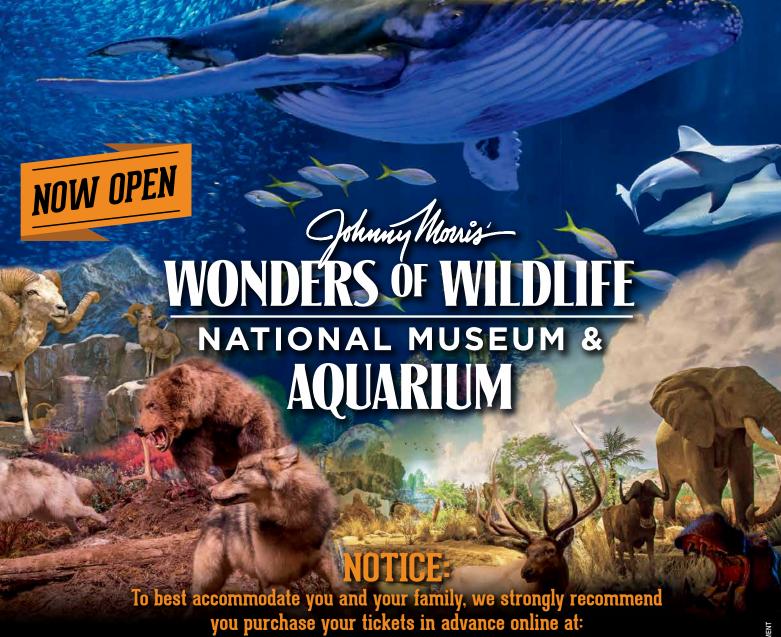

WONDERSOFWILDLIFE.ORG

500 W. SUNSHINE ST. · SPRINGFIELD, MO 65807 · 888-222-6060



NITRO.COM



BPSCS.18M.10/17.CP

INTERNATIONAL

Your authorized NITRO® Boats Dealer







